



**SOLID CARBIDE**  
**K-2**  
**END MILLS**

General Purpose  
Conventional or High Speed Milling  
Wet & Dry Cutting

◎ : Excellent ○ : Good

Recommended cutting conditions : P 597

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	G9624	G9A70	G9437	G9438
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎
	7		Quenched & Tempered	275	29	◎	◎	◎	◎
	8		Quenched & Tempered	300	32	◎	◎	◎	◎
	9		Quenched & Tempered	350	38	◎	◎	◎	◎
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎
	11	Quenched & Tempered		325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○	○	○
	14		Austenitic	180	10	○	○	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○
	18		Pearlitic	250	25	○	○	○	○
	19	Malleable cast iron	Ferritic	130		○	○	○	○
20	Pearlitic		230	21	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	○
	22		Curable Hardened	100		○	○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	○
	24		≤ 12% Si, Curable Hardened	90		○	○	○	○
	25		> 12% Si, Not Curable	130		○	○	○	○
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	○
	27		CuZn, CuSnZn (Brass)	90		○	○	○	○
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100		○	○	○	○
	29		Duroplastic, Fiber Reinforced Plastic						
30	Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	○	○	○
	32			Cured	280	30	○	○	○
	33		Ni or Co Based	Annealed	250	25	○	○	○
	34			Cured	350	38	○	○	○
	35			Cast	320	34	○	○	○
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○	
37	Alpha + Beta Alloys Hardened		1050 Rm		○	○	○		
H	38	Hardened steel	Hardened	550	55				
	39			630	60				
	40	Hardened Cast Iron	Cast	400	42	○	○	○	
	41			550	55	○	○	○	

SERIES	G9624	G9A70	G9437	G9438
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	≈ 30°	≈ 30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE
SIZE MIN	R1.0	R0.5	R1.0	R1.0
SIZE MAX	R10.0	R10.0	R10.0	R10.0
PAGE	548	549	550	551

SHORT LENGTH	SHORT LENGTH	SHORT LENGTH	LONG LENGTH
TiAlN	TiAlN	TiAlN	TiAlN



G9454	G9455	G9B81	G9634	G9B82	G9B83	G9B84	G9B85	G9424	G9G44	G9A68
2	2	2	4	2	2	4	4	2	2	2
30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°
BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE
R1.5	R1.5	R0.2	R1.0	D2.0	D3.0	D2.0	D3.0	D1.0	D3.0	D1.0
R10.0	R10.0	R2.0	R10.0	D12.0	D12.0	D12.0	D12.0	D20.0	D20.0	D20.0
552	553	554	556	557	559	560	562	563	564	565

LONG REACH	EXTRA LONG LENGTH	RIB PROCESSING	SHORT LENGTH	SHORT LENGTH	LONG REACH	SHORT LENGTH	LONG REACH	SHORT LENGTH	SHORT LENGTH WITH CHAMFER	SHORT LENGTH
TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN



◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	1
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	2
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	3
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	4
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	5
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	6
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	7
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	8
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	9
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	10
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	11
○	○	○	○	○	○	○	○	○	○	○	12
○	○	○	○	○	○	○	○	○	○	○	13
○	○	○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	17
○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	20
○	○	○	○	○	○	○	○	○	○	○	21
○	○	○	○	○	○	○	○	○	○	○	22
○	○	○	○	○	○	○	○	○	○	○	23
○	○	○	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	○	○	25
○	○	○	○	○	○	○	○	○	○	○	26
○	○	○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	○	○	28
											29
											30
○	○		○					○	○	○	31
○	○		○					○	○	○	32
○	○		○					○	○	○	33
○	○		○					○	○	○	34
○	○		○					○	○	○	35
○	○		○					○	○	○	36
○	○		○					○	○	○	37
											38
											39
○	○		○	○	○	○	○	○	○	○	40
											41



# SOLID CARBIDE K-2 END MILLS

General Purpose with Coating  
Conventional or High Speed Milling, Wet or Dry Cutting

Please visit  
[globaly1.com/mat](http://globaly1.com/mat)  
for material search


◎ : Excellent ○ : Good

Recommended cutting conditions : P 597


ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc					
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	◎	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎	
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	◎	
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎	
	7		Quenched & Tempered	275	29	◎	◎	◎	◎	
	8		Quenched & Tempered	300	32	◎	◎	◎	◎	
	9		Quenched & Tempered	350	38	◎	◎	◎	◎	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎	◎
	11	Quenched & Tempered		325	35	◎	◎	◎	◎	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	○	
	13		Martensitic Quenched & Tempered	240	23	○	○	○	○	
	14		Austenitic	180	10	○	○	○	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○	
	16		Pearlitic (Martensitic)	260	26	○	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○	
	18		Pearlitic	250	25	○	○	○	○	
	19	Malleable cast iron	Ferritic	130		○	○	○	○	
20	Pearlitic		230	21	○	○	○	○		
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	○	
	22		Curable Hardened	100		○	○	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	○	○	
	25		> 12% Si, Not Curable	130		○	○	○	○	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	○	
	27		CuZn, CuSnZn (Brass)	90		○	○	○	○	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper	100		○	○	○	○	
	29		Duroplastic, Fiber Reinforced Plastic			○	○	○	○	
30	Rubber, Wood, etc.									
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	○	○	○	○
	32			Cured	280	30	○	○	○	○
	33		Ni or Co Based	Annealed	250	25	○	○	○	○
	34			Cured	350	38	○	○	○	○
	35			Cast	320	34	○	○	○	○
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○	○	
37	Alpha + Beta Alloys Hardened		1050 Rm		○	○	○	○		
H	38	Hardened steel		Hardened	550	55				
	39			Hardened	630	60				
	40	Hardened Cast Iron		Cast	400	42	○	○	○	○
	41			Hardened	550	55				

SERIES	G9444	G9527	G9445	G9G45
FLUTE	2	2	2	2
HELIX ANGLE	≈ 30°	≈ 30°	≈ 30°	≈ 30°
CUTTING EDGE SHAPE	SQUARE	SQUARE	SQUARE	SQUARE
SIZE MIN	D2.0	D3.5	D2.0	D3.0
SIZE MAX	D20.0	D20.0	D20.0	D20.0
PAGE	566	567	568	570

SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER
TiAlN	TiAlN	TiAlN	TiAlN

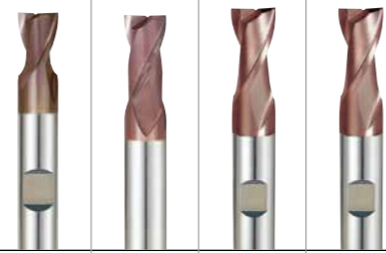

G9452	G9B80	G9410 G9553	G9G46	G9425	G9G47	G9439	G9528	G9433	G9G48	G9447
2	2	3	3	3	3	3	3	3	3	3
30°	30°	30°	30°	30°	30°	≈ 30°	≈ 30°	≈ 30°	≈ 30°	45°
SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE
D3.0	D0.4	D0.5	D3.0	D1.0	D3.0	D2.0	D3.5	D3.0	D3.0	D3.0
D20.0	D4.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0
571	572	575	577	578	579	580	581	582	583	584
EXTRA LONG LENGTH	RIB PROCESSING	THROW AWAY	THROW AWAY with CHAMFER	SHORT LENGTH	SHORT LENGTH with CHAMFER	SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER	LONG LENGTH
TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN

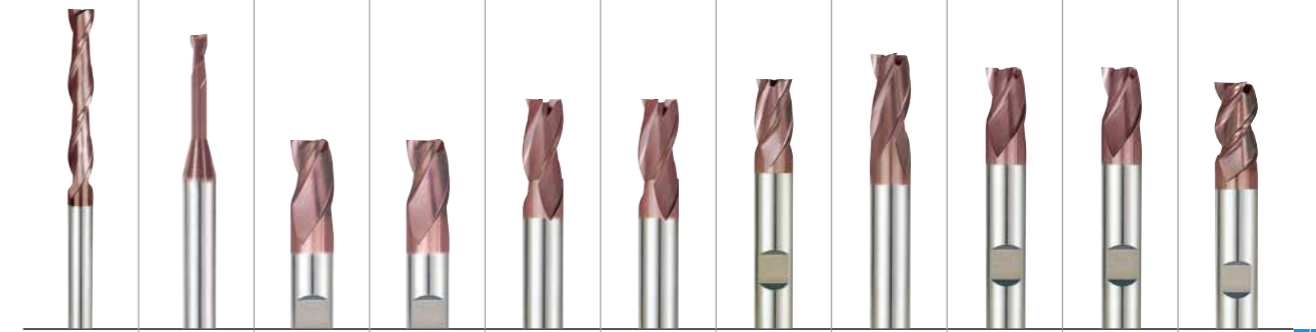

◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	1
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	2
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	3
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	4
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	5
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	6 P
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	7
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	8
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	9
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	10
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	11
○	○	○	○	○	○	○	○	○	○	○	12
○	○	○	○	○	○	○	○	○	○	○	13 M
○	○	○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	17 K
○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	20
○	○	○	○	○	○	○	○	○	○	○	21
○	○	○	○	○	○	○	○	○	○	○	22
○	○	○	○	○	○	○	○	○	○	○	23
○	○	○	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	○	○	25
○	○	○	○	○	○	○	○	○	○	○	26
○	○	○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	○	○	28
○	○	○	○	○	○	○	○	○	○	○	29
○	○	○	○	○	○	○	○	○	○	○	30
○	○	○	○	○	○	○	○	○	○	○	31
○	○	○	○	○	○	○	○	○	○	○	32
○	○	○	○	○	○	○	○	○	○	○	33
○	○	○	○	○	○	○	○	○	○	○	34 S
○	○	○	○	○	○	○	○	○	○	○	35
○	○	○	○	○	○	○	○	○	○	○	36
○	○	○	○	○	○	○	○	○	○	○	37
											38
											39
○	○	○	○	○	○	○	○	○	○	○	40 H
											41




**SOLID CARBIDE**  
**K-2**  
**END MILLS**

◎ : Excellent ○ : Good


Recommended cutting conditions : P 597

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	G9G49	G9432	G9G50	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	
	7		Quenched & Tempered	275	29	◎	◎	◎	
	8		Quenched & Tempered	300	32	◎	◎	◎	
	9		Quenched & Tempered	350	38	◎	◎	◎	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎
	11	Quenched & Tempered		325	35	◎	◎	◎	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	
	13		Martensitic Quenched & Tempered	240	23	○	○	○	
	14		Austenitic	180	10	○	○	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	
	16		Pearlitic (Martensitic)	260	26	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	○	
	18		Pearlitic	250	25	○	○	○	
	19		Ferritic	130		○	○	○	
20	Malleable cast iron	Pearlitic	230	21	○	○	○		
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	
	22		Curable Hardened	100		○	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	○	
	25		> 12% Si, Not Curable	130		○	○	○	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	
	27		CuZn, CuSnZn (Brass)	90		○	○	○	
	28		CuSn, lead-free copper and electrolytic copper	100		○	○	○	
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			○	○	○	
	30		Rubber, Wood, etc.			○	○	○	
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	○	○	○
	32			Cured	280	30	○	○	○
	33		Ni or Co Based	Annealed	250	25	○	○	○
	34			Cured	350	38	○	○	○
	35			Cast	320	34	○	○	○
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○	
37	Alpha + Beta Alloys		Hardened	1050 Rm		○	○		
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42	○	○	○	
	41	Hardened Cast Iron	Hardened	550	55				

SERIES	G9G49	G9432	G9G50
FLUTE	3	4	4
HELIX ANGLE	45°	30°	30°
CUTTING EDGE SHAPE	SQUARE	SQUARE	SQUARE
SIZE MIN	D3.0	D1.0	D3.0
SIZE MAX	D20.0	D20.0	D20.0
PAGE	585	586	587
	LONG LENGTH with CHAMFER	SHORT LENGTH	SHORT LENGTH with CHAMFER
	TiAlN	TiAlN	TiAlN

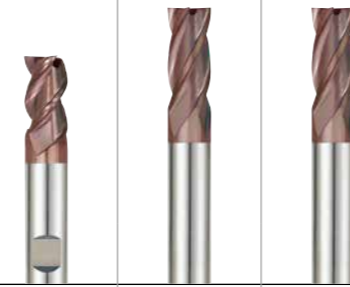

G9A69	G9448	G9540	G9449	G9G51	G9453	G9F45 G9F46	G9A42	G9400
4	4	4	4	4	4	4&6	Multi Flute	2
30°	≈ 30°	≈ 30°	≈ 30°	≈ 30°	30°	45°	30°	30°
SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING	DRILL MILL
D1.0	D2.0	D3.5	D2.0	D3.0	D3.0	D3.0	D6.0	D3.0
D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D25.0	D20.0
588	589	590	591	592	593	594	595	596
SHORT LENGTH	SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER	EXTRA LONG LENGTH	SHORT LENGTH LONG LENGTH	LONG LENGTH	-
TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	TiAlN	X-Coating	TiAlN

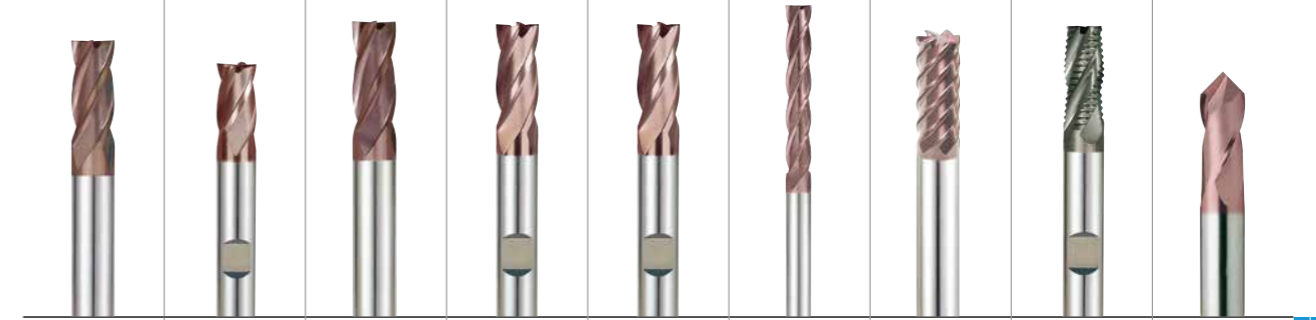


◎	◎	◎	◎	◎	◎	○	◎	◎	1
◎	◎	◎	◎	◎	◎	○	◎	◎	2
◎	◎	◎	◎	◎	◎	○	◎	◎	3
◎	◎	◎	◎	◎	◎	○	◎	◎	4
◎	◎	◎	◎	◎	◎	○	◎	◎	5
◎	◎	◎	◎	◎	◎	○	◎	◎	6 P
◎	◎	◎	◎	◎	◎	○	◎	◎	7
◎	◎	◎	◎	◎	◎	○	◎	◎	8
◎	◎	◎	◎	◎	◎	◎	◎	◎	9
◎	◎	◎	◎	◎	◎	○	◎	◎	10
◎	◎	◎	◎	◎	◎	◎	◎	◎	11
○	○	○	○	○	○	○	○	○	12
○	○	○	○	○	○	○	○	○	13 M
○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	17 K
○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	20
○	○	○	○	○	○	○	○	○	21
○	○	○	○	○	○	○	○	○	22
○	○	○	○	○	○	○	○	○	23
○	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	25 N
○	○	○	○	○	○	○	○	○	26
○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	28
○	○	○	○	○	○	○	○	○	29
○	○	○	○	○	○	○	○	○	30
○	○	○	○	○	○	○	○	○	31
○	○	○	○	○	○	○	○	○	32
○	○	○	○	○	○	○	○	○	33
○	○	○	○	○	○	○	○	○	34 S
○	○	○	○	○	○	○	○	○	35
○	○	○	○	○	○	○	○	○	36
○	○	○	○	○	○	○	○	○	37
						○			38
						○			39
○	○	○	○	○	○	○	○	○	40 H
						○			41

**CARBIDE, 2 FLUTE SHORT LENGTH BALL NOSE**

● **VOLLHARTMETALL, 2 SCHNEIDEN KURZ STIRNRADIUS**  
 ( ) **Fraise carbure, 2 dents, hémisphérique, courte**  
 ( ) **2 TAGLIENTI, SEMISFERICA, SERIE CORTA**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.

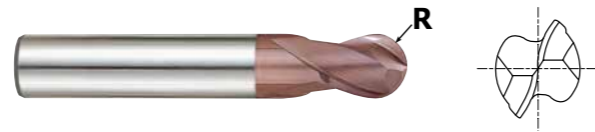

Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9624020	R1.0	2.0	6	4	48
G9624025	R1.25	2.5	6	4	48
G9624030	R1.5	3.0	6	4	48
G9624040	R2.0	4.0	6	6	50
G9624901	R2.0	4.0	4	12	40
G9624050	R2.5	5.0	6	7	51
G9624902	R2.5	5.0	5	14	50
G9624060	R3.0	6.0	6	7	51
G9624080	R4.0	8.0	8	9	59
G9624100	R5.0	10.0	10	10	60
G9624120	R6.0	12.0	12	14	71
G9624140	R7.0	14.0	14	14	71
G9624160	R8.0	16.0	16	16	76
G9624180	R9.0	18.0	18	18	76
G9624200	R10.0	20.0	20	20	82

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

**CARBIDE, 2 FLUTE SHORT LENGTH BALL NOSE**

● **VOLLHARTMETALL, 2 SCHNEIDEN KURZ STIRNRADIUS**  
 ( ) **Fraise carbure, 2 dents, hémisphérique, courte**  
 ( ) **2 TAGLIENTI, SEMISFERICA, SERIE CORTA**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9A70010	R0.5	1.0	3	3	39
G9A70015	R0.75	1.5	3	5	39
G9A70020	R1.0	2.0	3	7	39
G9A70025	R1.25	2.5	3	8	39
G9A70030	R1.5	3.0	3	9	39
G9A70040	R2.0	4.0	4	14	51
G9A70050	R2.5	5.0	5	16	51
G9A70060	R3.0	6.0	6	19	64
G9A70080	R4.0	8.0	8	21	64
G9A70100	R5.0	10.0	10	22	70
G9A70110	R5.5	11.0	11	25	70
G9A70120	R6.0	12.0	12	25	76
G9A70160	R8.0	16.0	16	32	89
G9A70200	R10.0	20.0	20	38	102

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE SHORT LENGTH BALL NOSE**

- VOLLHARTMETALL, 2 SCHNEIDEN KURZ STIRNRADIUS
- ( ) Fraise carbure, 2 dents, hémisphérique, courte
- ( ) 2 TAGLIENTI, SEMISFERICA, SERIE CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9437020	R1.0	2.0	6	3	50
G9437030	R1.5	3.0	6	4	50
G9437040	R2.0	4.0	6	5	54
G9437050	R2.5	5.0	6	6	54
G9437060	R3.0	6.0	6	7	54
G9437080	R4.0	8.0	8	9	58
G9437100	R5.0	10.0	10	11	66
G9437120	R6.0	12.0	12	12	73
G9437140	R7.0	14.0	14	14	75
G9437180	R9.0	18.0	18	18	84
G9437200	R10.0	20.0	20	20	92

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

**CARBIDE, 2 FLUTE LONG LENGTH BALL NOSE**

- VOLLHARTMETALL, 2 SCHNEIDEN LANG STIRNRADIUS
- ( ) Fraise carbure, 2 dents, hémisphérique, longue
- ( ) 2 TAGLIENTI, SEMISFERICA, SERIE LUNGA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9438020	R1.0	2.0	3	6	38
G9438030	R1.5	3.0	6	7	57
G9438040	R2.0	4.0	6	8	57
G9438050	R2.5	5.0	6	10	57
G9438060	R3.0	6.0	6	10	57
G9438080	R4.0	8.0	8	16	63
G9438100	R5.0	10.0	10	19	72
G9438120	R6.0	12.0	12	22	83
G9438140	R7.0	14.0	14	22	83
G9438160	R8.0	16.0	16	26	92
G9438180	R9.0	18.0	18	26	92
G9438200	R10.0	20.0	20	32	104

● with plain shank

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

**CARBIDE, 2 FLUTE LONG REACH BALL NOSE**

● VOLLHARTMETALL, 2 SCHNEIDEN GROÙE REICHWEITE STIRNRADIUS  
 ( ) Fraise carbure, 2 dents, hémisphérique longue portée  
 ( ) 2 TAGLIENTI, SEMISFERICA, GAMBO LUNGO

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Radius of Ball Nose R ( ± 0.02)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9454030	R1.5	3.0	3	5	75
G9454040	R2.0	4.0	4	8	75
G9454050	R2.5	5.0	5	9	75
G9454060	R3.0	6.0	6	10	100
G9454080	R4.0	8.0	8	12	100
G9454100	R5.0	10.0	10	14	100
G9454120	R6.0	12.0	12	16	100
G9454140	R7.0	14.0	14	18	100
G9454160	R8.0	16.0	16	22	150
G9454200	R10.0	20.0	20	26	150

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE EXTRA LONG LENGTH BALL NOSE**

● VOLLHARTMETALL, 2 SCHNEIDEN EXTRA LANG STIRNRADIUS  
 ( ) Fraise carbure, 2 dents, hémisphérique, extra-longue  
 ( ) 2 TAGLIENTI, SEMISFERICA, SERIE EXTRA LUNGA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.

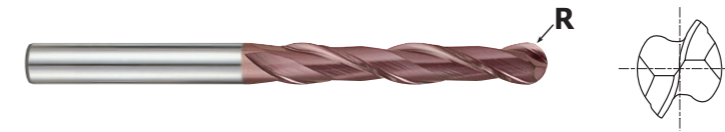

Unit : mm

EDP No.	Radius of Ball Nose R ( ± 0.02)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9455903	R1.5	3.0	3	20	60
G9455030	R1.5	3.0	3	30	75
G9455904	R2.0	4.0	4	20	60
G9455040	R2.0	4.0	4	30	75
G9455905	R2.5	5.0	5	25	75
G9455050	R2.5	5.0	5	40	100
G9455906	R3.0	6.0	6	30	75
G9455060	R3.0	6.0	6	50	150
G9455908	R4.0	8.0	8	30	75
G9455080	R4.0	8.0	8	50	150
G9455910	R5.0	10.0	10	40	100
G9455100	R5.0	10.0	10	60	150
G9455912	R6.0	12.0	12	45	100
G9455120	R6.0	12.0	12	75	150
G9455914	R7.0	14.0	14	45	100
G9455140	R7.0	14.0	14	75	150
G9455916	R8.0	16.0	16	45	100
G9455160	R8.0	16.0	16	75	150
G9455918	R9.0	18.0	18	45	100
G9455180	R9.0	18.0	18	75	150
G9455920	R10.0	20.0	20	45	100
G9455200	R10.0	20.0	20	75	150

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING**

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
- ① Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
- ② TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.

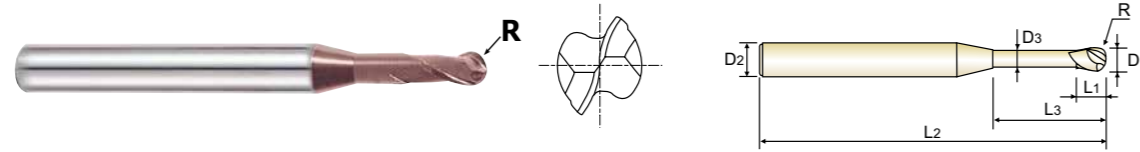

Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length D3	Neck Diameter D3
G9B81004	R0.2	0.4	4	0.7	2	50	0.37
G9B81005	R0.25	0.5	4	0.75	2	50	0.45
G9B81901	R0.25	0.5	4	0.75	4	50	0.45
G9B81902	R0.25	0.5	4	0.75	6	50	0.45
G9B81006	R0.3	0.6	4	0.9	2	50	0.55
G9B81903	R0.3	0.6	4	0.9	4	50	0.55
G9B81904	R0.3	0.6	4	0.9	6	50	0.55
G9B81008	R0.4	0.8	4	1.2	4	50	0.75
G9B81905	R0.4	0.8	4	1.2	6	50	0.75
G9B81906	R0.4	0.8	4	1.2	8	50	0.75
G9B81010	R0.5	1.0	4	1.5	6	50	0.95
G9B81907	R0.5	1.0	4	1.5	8	50	0.95
G9B81908	R0.5	1.0	4	1.5	10	50	0.95
G9B81909	R0.5	1.0	4	1.5	12	50	0.95
G9B81012	R0.6	1.2	4	1.8	8	50	1.15
G9B81910	R0.6	1.2	4	1.8	12	50	1.15
G9B81014	R0.7	1.4	4	2.1	16	50	1.35
G9B81015	R0.75	1.5	4	2.3	6	50	1.45
G9B81911	R0.75	1.5	4	2.3	8	50	1.45
G9B81912	R0.75	1.5	4	2.3	10	50	1.45
G9B81913	R0.75	1.5	4	2.3	12	50	1.45
G9B81914	R0.75	1.5	4	2.3	16	50	1.45
G9B81915	R0.75	1.5	4	2.3	20	50	1.45
G9B81016	R0.8	1.6	4	2.4	8	50	1.55

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P					M				K										
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel		Grey cast iron		Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE BALL NOSE for RIB PROCESSING**

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS für SCHMALE RIPPEN
- ① Fraise carbure, 2 dents, hémisphérique pour usinage de rainure
- ② TAGLIENTI, SEMISFERICA, SCARICATA PER NERVATURE

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.

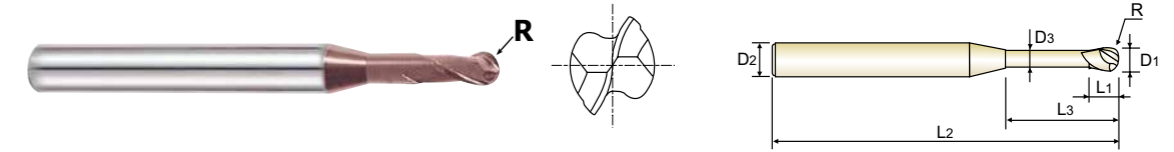

Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length D3	Neck Diameter D3
G9B81916	R0.8	1.6	4	2.4	12	50	1.55
G9B81917	R0.8	1.6	4	2.4	16	50	1.55
G9B81918	R0.8	1.6	4	2.4	20	50	1.55
G9B81020	R1.0	2.0	4	3	8	50	1.95
G9B81919	R1.0	2.0	4	3	10	50	1.95
G9B81920	R1.0	2.0	4	3	12	50	1.95
G9B81921	R1.0	2.0	4	3	14	50	1.95
G9B81922	R1.0	2.0	4	3	16	50	1.95
G9B81923	R1.0	2.0	4	3	20	50	1.95
G9B81030	R1.5	3.0	6	4.5	10	50	2.85
G9B81924	R1.5	3.0	6	4.5	12	50	2.85
G9B81925	R1.5	3.0	6	4.5	16	60	2.85
G9B81926	R1.5	3.0	6	4.5	20	60	2.85
G9B81927	R1.5	3.0	6	4.5	25	75	2.85
G9B81040	R2.0	4.0	6	6	12	50	3.85
G9B81928	R2.0	4.0	6	6	16	60	3.85
G9B81929	R2.0	4.0	6	6	20	75	3.85
G9B81930	R2.0	4.0	6	6	25	75	3.85
G9B81931	R2.0	4.0	6	6	30	75	3.85

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO	P					M				K										
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel		Grey cast iron		Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 4 FLUTE SHORT LENGTH BALL NOSE**

● VOLLHARTMETALL, 4 SCHNEIDEN KURZ STIRNRADIUS  
 ( ) Fraise carbure, 4 dents, hémisphérique, courte  
 ( ) 4 TAGLIENTI, SEMISFERICA, SERIE CORTA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 4 flute allows for better work piece finishes.
- Designed for milling of radius bottom slots, fillets and special contours.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.
- Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Radius of Ball Nose R (±0.02)	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9634020	R1.0	2.0	6	4	48
G9634030	R1.5	3.0	6	4	48
G9634040	R2.0	4.0	6	6	50
G9634050	R2.5	5.0	6	7	51
G9634060	R3.0	6.0	6	7	51
G9634080	R4.0	8.0	8	9	59
G9634100	R5.0	10.0	10	10	60
G9634120	R6.0	12.0	12	14	71
G9634140	R7.0	14.0	14	14	71
G9634160	R8.0	16.0	16	16	76
G9634180	R9.0	18.0	18	18	76
G9634200	R10.0	20.0	20	20	82

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	15	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	400	200	325	200	240	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE SHORT LENGTH CORNER RADIUS**

● VOLLHARTMETALL, 2 SCHNEIDEN KURZ ECKENRADIUS  
 ( ) Fraise carbure, 2 dents, torique, courte  
 ( ) 2 TAGLIENTI, SERIE CORTA, TORICA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 2 flute design for slotting.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Corner Radius R	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9B82020	R0.2	2.0	4	4	50
G9B82901	R0.3	2.0	4	4	50
G9B82902	R0.5	2.0	4	4	50
G9B82025	R0.2	2.5	4	5	50
G9B82903	R0.3	2.5	4	5	50
G9B82904	R0.5	2.5	4	5	50
G9B82030	R0.2	3.0	4	6	50
G9B82905	R0.3	3.0	4	6	50
G9B82906	R0.5	3.0	4	6	50
G9B82907	R1.0	3.0	4	6	50
G9B82040	R0.2	4.0	4	8	50
G9B82908	R0.3	4.0	4	8	50
G9B82909	R0.5	4.0	4	8	50
G9B82910	R1.0	4.0	4	8	50
G9B82050	R0.2	5.0	6	10	50
G9B82911	R0.3	5.0	6	10	50
G9B82912	R0.5	5.0	6	10	50
G9B82913	R1.0	5.0	6	10	50
G9B82060	R0.2	6.0	6	12	50
G9B82914	R0.3	6.0	6	12	50
G9B82915	R0.5	6.0	6	12	50
G9B82916	R1.0	6.0	6	12	50

► NEXT PAGE

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	15	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	400	200	325	200	240	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



**CARBIDE, 2 FLUTE SHORT LENGTH CORNER RADIUS**

● **VOLLHARTMETALL, 2 SCHNEIDEN KURZ ECKENRADIUS**  
 ( ) **Fraise carbure, 2 dents, torique, courte**  
 ( ) **2 TAGLIENTI, SERIE CORTA, TORICA**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Corner Radius R	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9B82080	R0.5	8.0	8	16	60
G9B82917	R1.0	8.0	8	16	60
G9B82918	R1.5	8.0	8	16	60
G9B82919	R2.0	8.0	8	16	60
G9B82920	R2.5	8.0	8	16	60
G9B82100	R0.5	10.0	10	20	75
G9B82921	R1.0	10.0	10	20	75
G9B82922	R1.5	10.0	10	20	75
G9B82923	R2.0	10.0	10	20	75
G9B82924	R2.5	10.0	10	20	75
G9B82120	R0.5	12.0	12	24	75
G9B82925	R1.0	12.0	12	24	75
G9B82926	R1.5	12.0	12	24	75
G9B82927	R2.0	12.0	12	24	75
G9B82928	R2.5	12.0	12	24	75

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE LONG REACH CORNER RADIUS**

● **VOLLHARTMETALL, 2 SCHNEIDEN GROÙE REICHWEITE ECKENRADIUS**  
 ( ) **Fraise carbure, 2 dents, torique longue portée**  
 ( ) **2 TAGLIENTI, SERIE LUNGA, TORICA**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Corner Radius R	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9B83030	R0.5	3.0	4	6	75
G9B83901	R1.0	3.0	4	6	75
G9B83040	R0.5	4.0	4	8	75
G9B83902	R1.0	4.0	4	8	75
G9B83050	R0.5	5.0	6	10	75
G9B83903	R1.0	5.0	6	10	75
G9B83060	R0.5	6.0	6	12	75
G9B83904	R1.0	6.0	6	12	75
G9B83080	R0.5	8.0	8	16	100
G9B83905	R1.0	8.0	8	16	100
G9B83906	R1.5	8.0	8	16	100
G9B83907	R2.0	8.0	8	16	100
G9B83908	R2.5	8.0	8	16	100
G9B83100	R0.5	10.0	10	20	100
G9B83909	R1.0	10.0	10	20	100
G9B83910	R1.5	10.0	10	20	100
G9B83911	R2.0	10.0	10	20	100
G9B83912	R2.5	10.0	10	20	100
G9B83120	R0.5	12.0	12	24	100
G9B83913	R1.0	12.0	12	24	100
G9B83914	R1.5	12.0	12	24	100
G9B83915	R2.0	12.0	12	24	100
G9B83916	R2.5	12.0	12	24	100

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 4 FLUTE SHORT LENGTH CORNER RADIUS**

● **VOLLHARTMETALL, 4 SCHNEIDEN KURZ ECKENRADIUS**  
 ( ) **Fraise carbure, 4 dents, torique, courte**  
 ( ) **4 TAGLIANTI, SERIE CORTA, TORICA**

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Corner Radius R	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9B84020	R0.2	2.0	4	4	50
G9B84901	R0.3	2.0	4	4	50
G9B84902	R0.5	2.0	4	4	50
G9B84025	R0.2	2.5	4	5	50
G9B84903	R0.3	2.5	4	5	50
G9B84904	R0.5	2.5	4	5	50
G9B84030	R0.2	3.0	4	6	50
G9B84905	R0.3	3.0	4	6	50
G9B84906	R0.5	3.0	4	6	50
G9B84907	R1.0	3.0	4	6	50
G9B84040	R0.2	4.0	4	8	50
G9B84908	R0.3	4.0	4	8	50
G9B84909	R0.5	4.0	4	8	50
G9B84910	R1.0	4.0	4	8	50
G9B84050	R0.2	5.0	6	10	50
G9B84911	R0.3	5.0	6	10	50
G9B84912	R0.5	5.0	6	10	50
G9B84913	R1.0	5.0	6	10	50
G9B84060	R0.2	6.0	6	12	50
G9B84914	R0.3	6.0	6	12	50
G9B84915	R0.5	6.0	6	12	50
G9B84916	R1.0	6.0	6	12	50
G9B84080	R0.5	8.0	8	16	60
G9B84917	R1.0	8.0	8	16	60

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

► NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 4 FLUTE SHORT LENGTH CORNER RADIUS**

● **VOLLHARTMETALL, 4 SCHNEIDEN KURZ ECKENRADIUS**  
 ( ) **Fraise carbure, 4 dents, torique, courte**  
 ( ) **4 TAGLIANTI, SERIE CORTA, TORICA**

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Corner Radius R	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9B84918	R1.5	8.0	8	16	60
G9B84919	R2.0	8.0	8	16	60
G9B84920	R2.5	8.0	8	16	60
G9B84100	R0.5	10.0	10	20	75
G9B84921	R1.0	10.0	10	20	75
G9B84922	R1.5	10.0	10	20	75
G9B84923	R2.0	10.0	10	20	75
G9B84924	R2.5	10.0	10	20	75
G9B84120	R0.5	12.0	12	24	75
G9B84925	R1.0	12.0	12	24	75
G9B84926	R1.5	12.0	12	24	75
G9B84927	R2.0	12.0	12	24	75
G9B84928	R2.5	12.0	12	24	75

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 4 FLUTE LONG REACH CORNER RADIUS**

- VOLLHARTMETALL, 4 SCHNEIDEN GROÙE REICHWEITE ECKENRADIUS
- Fraise carbure, 4 dents, torique longue portée
- 4 TAGLIANTI, SERIE LUNGA, TORICA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- Bestimmt für das Fräsen von Nuten mit konvexem Grund, Sonderprofilen und zum Kopieren.



Unit : mm

EDP No.	Corner Radius R	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9B85030	R0.5	3.0	4	6	75
G9B85901	R1.0	3.0	4	6	75
G9B85040	R0.5	4.0	4	8	75
G9B85902	R1.0	4.0	4	8	75
G9B85050	R0.5	5.0	6	10	75
G9B85903	R1.0	5.0	6	10	75
G9B85060	R0.5	6.0	6	12	75
G9B85904	R1.0	6.0	6	12	75
G9B85080	R0.5	8.0	8	16	100
G9B85905	R1.0	8.0	8	16	100
G9B85906	R1.5	8.0	8	16	100
G9B85907	R2.0	8.0	8	16	100
G9B85908	R2.5	8.0	8	16	100
G9B85100	R0.5	10.0	10	20	100
G9B85909	R1.0	10.0	10	20	100
G9B85910	R1.5	10.0	10	20	100
G9B85911	R2.0	10.0	10	20	100
G9B85912	R2.5	10.0	10	20	100
G9B85120	R0.5	12.0	12	24	100
G9B85913	R1.0	12.0	12	24	100
G9B85914	R1.5	12.0	12	24	100
G9B85915	R2.0	12.0	12	24	100
G9B85916	R2.5	12.0	12	24	100

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	23	10	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 2 SCHNEIDEN KURZ
- Fraise carbure, 2 dents, courte
- 2 TAGLIANTI, CORTA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 2 flute design for slotting.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9424010	1.0	4	3	40
G9424015	1.5	4	4.5	40
G9424020	2.0	2	8	32
G9424025	2.5	2.5	8	32
G9424030	3.0	3	12	32
G9424035	3.5	3.5	12	32
G9424040	4.0	4	12	40
G9424045	4.5	4.5	14	50
G9424050	5.0	5	14	50
G9424055	5.5	5.5	16	50
G9424060	6.0	6	16	50
G9424070	7.0	7	20	60
G9424080	8.0	8	20	60
G9424090	9.0	9	20	60
G9424100	10.0	10	22	70
G9424120	12.0	12	22	70
G9424140	14.0	14	25	75
G9424160	16.0	16	25	75
G9424200	20.0	20	32	100

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	23	10	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE SHORT LENGTH WITH CHAMFER**

● VOLLHARTMETALL, 2 SCHNEIDEN KURZ  
 ( ) Fraise carbure, 2 dents, courte  
 ( ) 2 TAGLIENTI, CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.


- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.

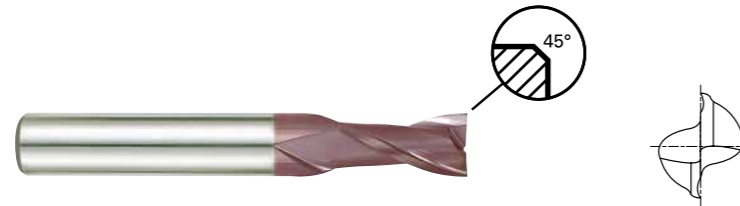

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G44030	3.0	3	12	32	0.10
G9G44040	4.0	4	12	40	0.10
G9G44050	5.0	5	14	50	0.10
G9G44060	6.0	6	16	50	0.10
G9G44080	8.0	8	20	60	0.13
G9G44100	10.0	10	22	70	0.13
G9G44120	12.0	12	22	70	0.18
G9G44140	14.0	14	25	75	0.18
G9G44160	16.0	16	25	75	0.18
G9G44200	20.0	20	32	100	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5



**CARBIDE, 2 FLUTE SHORT LENGTH**

● VOLLHARTMETALL, 2 SCHNEIDEN KURZ  
 ( ) Fraise carbure, 2 dents, courte  
 ( ) 2 TAGLIENTI, CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9A68010	1.0	3	3	39
G9A68015	1.5	3	5	39
G9A68020	2.0	3	7	39
G9A68025	2.5	3	7	39
G9A68030	3.0	3	9	39
G9A68040	4.0	4	14	51
G9A68050	5.0	5	16	51
G9A68060	6.0	6	19	64
G9A68080	8.0	8	21	64
G9A68100	10.0	10	22	70
G9A68120	12.0	12	25	76
G9A68160	16.0	16	32	89
G9A68200	20.0	20	38	102

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N				S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N				S										H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 2 SCHNEIDEN KURZ
- Fraise carbure, 2 dents, courte
- 2 TAGLIENTI, CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9444020	2.0	6	3	50
G9444030	3.0	6	4	50
G9444035	3.5	6	4	50
G9444040	4.0	6	5	54
G9444045	4.5	6	5	54
G9444050	5.0	6	6	54
G9444060	6.0	6	7	54
G9444070	7.0	8	8	58
G9444080	8.0	8	9	58
G9444090	9.0	10	10	66
G9444100	10.0	10	11	66
G9444120	12.0	12	12	73
G9444140	14.0	14	14	75
G9444160	16.0	16	16	82
G9444180	18.0	18	18	84
G9444200	20.0	20	20	92

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE LONG LENGTH**

- VOLLHARTMETALL, 2 SCHNEIDEN LANG
- Fraise carbure, 2 dents, longue
- 2 TAGLIENTI, SERIE LUNGA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9527035	3.5	3.5	7	50
G9527040	4.0	4	8	50
G9527045	4.5	4.5	8	50
G9527050	5.0	5	10	50
G9527055	5.5	5.5	10	57
G9527060	6.0	6	10	57
G9527065	6.5	6.5	13	60
G9527070	7.0	7	13	60
G9527075	7.5	7.5	16	63
G9527080	8.0	8	16	63
G9527085	8.5	8.5	16	67
G9527090	9.0	9	16	67
G9527095	9.5	9.5	19	72
G9527100	10.0	10	19	72
G9527110	11.0	11	22	83
G9527120	12.0	12	22	83
G9527130	13.0	13	22	83
G9527140	14.0	14	22	83
G9527150	15.0	15	26	92
G9527160	16.0	16	26	92
G9527180	18.0	18	26	92
G9527200	20.0	20	32	104

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE LONG LENGTH**

● VOLLHARTMETALL, 2 SCHNEIDEN LANG  
 ( ) Fraise carbure, 2 dents, longue  
 ( ) 2 TAGLIENTI, SERIE LUNGA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.



up to Ø2mm over Ø2mm



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9445901	2.0	● 3	6	38
G9445028	2.8	6	7	57
G9445030	3.0	6	7	57
G9445035	3.5	6	7	57
G9445038	3.8	6	8	57
G9445040	4.0	6	8	57
G9445045	4.5	6	8	57
G9445048	4.8	6	10	57
G9445050	5.0	6	10	57
G9445957	5.8	6	10	57
G9445060	6.0	6	10	57
G9445967	6.8	8	13	63
G9445070	7.0	8	13	63
G9445977	7.8	8	16	63
G9445080	8.0	8	16	63
G9445087	8.7	10	16	72
G9445090	9.0	10	16	72
G9445097	9.7	10	19	72
G9445100	10.0	10	19	72
G9445117	11.7	12	22	83
G9445120	12.0	12	22	83
G9445137	13.7	14	22	83
G9445140	14.0	14	22	83

● with plain shank

▶ NEXT PAGE

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE LONG LENGTH**

● VOLLHARTMETALL, 2 SCHNEIDEN LANG  
 ( ) Fraise carbure, 2 dents, longue  
 ( ) 2 TAGLIENTI, SERIE LUNGA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.



up to Ø2mm over Ø2mm



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9445157	15.7	16	26	92
G9445160	16.0	16	26	92
G9445177	17.7	18	26	92
G9445180	18.0	18	26	92
G9445197	19.7	20	32	104
G9445200	20.0	20	32	104

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE LONG LENGTH WITH CHAMFER**

● VOLLHARTMETALL, 2 SCHNEIDEN LANG  
 ( ) Fraise carbure, 2 dents, longue  
 ( ) 2 TAGLIENTI, SERIE LUNGA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 2 flute design for slotting.


- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 2 Schneiden zum Nutenfräsen.

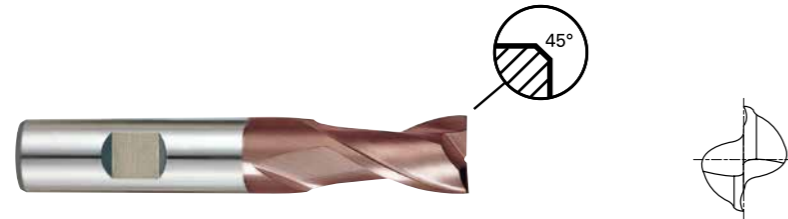

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G45030	3.0	6	7	57	0.10
G9G45040	4.0	6	8	57	0.10
G9G45050	5.0	6	10	57	0.10
G9G45060	6.0	6	10	57	0.10
G9G45080	8.0	8	16	63	0.13
G9G45100	10.0	10	19	72	0.13
G9G45120	12.0	12	22	83	0.18
G9G45140	14.0	14	22	83	0.18
G9G45160	16.0	16	26	92	0.18
G9G45200	20.0	20	32	104	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE EXTRA LONG LENGTH**

● VOLLHARTMETALL, 2 SCHNEIDEN EXTRA LANG  
 ( ) Fraise carbure, 2 dents, extra-longue  
 ( ) 2 TAGLIENTI, SERIE EXTRA LUNGA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 2 flute design for slotting.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 2 Schneiden zum Nutenfräsen.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9452903	3.0	3	20	60
G9452030	3.0	3	30	75
G9452904	4.0	4	20	60
G9452040	4.0	4	30	75
G9452905	5.0	5	25	75
G9452050	5.0	5	40	100
G9452906	6.0	6	30	75
G9452060	6.0	6	50	150
G9452908	8.0	8	30	75
G9452080	8.0	8	50	150
G9452910	10.0	10	40	100
G9452100	10.0	10	60	150
G9452912	12.0	12	45	100
G9452120	12.0	12	75	150
G9452914	14.0	14	45	100
G9452140	14.0	14	65	150
G9452916	16.0	16	45	100
G9452160	16.0	16	65	150
G9452918	18.0	18	45	100
G9452180	18.0	18	65	150
G9452920	20.0	20	45	100
G9452200	20.0	20	65	150

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 2 FLUTE RIB PROCESSING**

- VOLLHARTMETALL, 2 SCHNEIDEN SCHMALE RIPPEN
- ( ) Fraise carbure, 2 dents pour usinage de rainure
- ( ) 2 TAGLIENTI, SCARICATA PER NERVATURE

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.

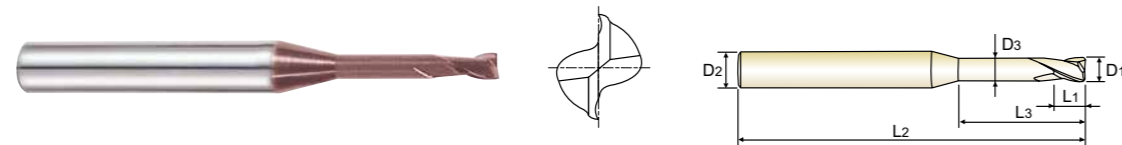

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	D3	D3
G9B80004	0.4	4	0.7	2	50	0.37
G9B80901	0.4	4	0.7	4	50	0.37
G9B80005	0.5	4	0.75	2	50	0.45
G9B80902	0.5	4	0.75	4	50	0.45
G9B80903	0.5	4	0.75	6	50	0.45
G9B80006	0.6	4	0.9	2	50	0.55
G9B80904	0.6	4	0.9	4	50	0.55
G9B80905	0.6	4	0.9	6	50	0.55
G9B80007	0.7	4	1.1	4	50	0.65
G9B80906	0.7	4	1.1	6	50	0.65
G9B80008	0.8	4	1.2	4	50	0.75
G9B80907	0.8	4	1.2	6	50	0.75
G9B80908	0.8	4	1.2	8	50	0.75
G9B80009	0.9	4	1.4	6	50	0.85
G9B80909	0.9	4	1.4	8	50	0.85
G9B80910	0.9	4	1.4	10	50	0.85
G9B80010	1.0	4	1.5	6	50	0.95
G9B80911	1.0	4	1.5	8	50	0.95
G9B80912	1.0	4	1.5	10	50	0.95
G9B80913	1.0	4	1.5	12	50	0.95
G9B80012	1.2	4	1.8	6	50	1.15
G9B80914	1.2	4	1.8	8	50	1.15
G9B80915	1.2	4	1.8	10	50	1.15
G9B80916	1.2	4	1.8	12	50	1.15

▶ NEXT PAGE

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○


ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE RIB PROCESSING**

- VOLLHARTMETALL, 2 SCHNEIDEN SCHMALE RIPPEN
- ( ) Fraise carbure, 2 dents pour usinage de rainure
- ( ) 2 TAGLIENTI, SCARICATA PER NERVATURE

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.

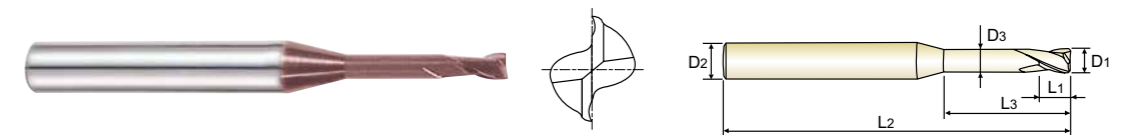

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	D3	D3
G9B80015	1.5	4	2.3	6	50	1.45
G9B80917	1.5	4	2.3	8	50	1.45
G9B80918	1.5	4	2.3	10	50	1.45
G9B80919	1.5	4	2.3	12	50	1.45
G9B80920	1.5	4	2.3	14	50	1.45
G9B80921	1.5	4	2.3	16	50	1.45
G9B80922	1.5	4	2.3	18	50	1.45
G9B80923	1.5	4	2.3	20	50	1.45
G9B80020	2.0	4	3	6	50	1.95
G9B80924	2.0	4	3	8	50	1.95
G9B80925	2.0	4	3	10	50	1.95
G9B80926	2.0	4	3	12	50	1.95
G9B80927	2.0	4	3	14	50	1.95
G9B80928	2.0	4	3	16	50	1.95
G9B80929	2.0	4	3	18	50	1.95
G9B80930	2.0	4	3	20	50	1.95
G9B80025	2.5	4	3.7	8	50	2.40
G9B80931	2.5	4	3.7	12	50	2.40
G9B80932	2.5	4	3.7	16	50	2.40
G9B80933	2.5	4	3.7	20	50	2.40

▶ NEXT PAGE

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○




**CARBIDE, 2 FLUTE RIB PROCESSING**

- VOLLHARTMETALL, 2 SCHNEIDEN SCHMALE RIPPEN
- ( ) Fraise carbure, 2 dents pour usinage de rainure
- ( ) 2 TAGLIENTI, SCARICATA PER NERVATURE

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 2 Schneiden zum Nutenfräsen.

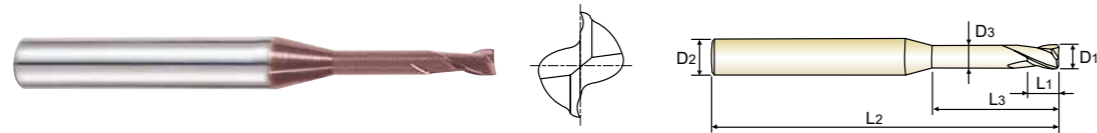

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	D3	D3
G9B80030	3.0	6	4.5	8	50	2.85
G9B80934	3.0	6	4.5	12	50	2.85
G9B80935	3.0	6	4.5	16	60	2.85
G9B80936	3.0	6	4.5	20	60	2.85
G9B80937	3.0	6	4.5	25	75	2.85
G9B80040	4.0	6	6	12	50	3.85
G9B80938	4.0	6	6	16	60	3.85
G9B80939	4.0	6	6	20	75	3.85
G9B80940	4.0	6	6	25	75	3.85
G9B80941	4.0	6	6	30	75	3.85
G9B80942	4.0	6	6	35	75	3.85

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○													

**CARBIDE, 3 FLUTE SHORT LENGTH THROW AWAY**

- VOLLHARTMETALL, 3 SCHNEIDEN KURZ EINWEGFRÄSER
- ( ) Fraise carbure, 3 dents, à jeter, courte
- ( ) 3 TAGLIENTI, SERIE EXTRA CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design possesses the advantage of 2 flute and 4 flute end mill.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schaffräsern.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9553005	0.5	3	1.5	38
G9553006	0.6	3	1.5	38
G9553008	0.8	3	2	38
G9553010	1.0	3	2	38
G9553012	1.2	3	2	38
G9553015	1.5	3	2	38
G9553018	1.8	3	2	38
-	G9410020	2.0	6	35
-	G9410025	2.5	6	36
-	G9410030	3.0	6	36
-	G9410035	3.5	6	37
-	G9410040	4.0	6	38
-	G9410045	4.5	6	38
-	G9410050	5.0	6	39
-	G9410055	5.5	6	39
-	G9410957	5.8	6	39
-	G9410060	6.0	6	39
-	G9410967	6.8	8	42
-	G9410070	7.0	8	42
-	G9410977	7.8	8	42
-	G9410080	8.0	8	43
-	G9410087	8.7	10	48
-	G9410090	9.0	10	48
-	G9410097	9.7	10	48

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○													

**CARBIDE, 3 FLUTE SHORT LENGTH THROW AWAY**

● VOLLHARTMETALL, 3 SCHNEIDEN KURZ EINWEGFRÄSER  
 ( ) Fraise carbure, 3 dents, à jeter, courte  
 ( ) 3 TAGLIENTI, SERIE EXTRA CORTA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 3 flute design possesses the advantage of 2 flute and 4 flute end mill.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.



Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT				
-	<b>G9410100</b>	<b>10.0</b>	10	13	50
-	<b>G9410120</b>	<b>12.0</b>	12	15	55
-	<b>G9410140</b>	<b>14.0</b>	14	15	58
-	<b>G9410160</b>	<b>16.0</b>	16	18	62
-	<b>G9410180</b>	<b>18.0</b>	18	20	70
-	<b>G9410200</b>	<b>20.0</b>	20	22	75


Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

**CARBIDE, 3 FLUTE SHORT LENGTH THROW AWAY WITH CHAMFER**

● VOLLHARTMETALL, 3 SCHNEIDEN KURZ EINWEGFRÄSER  
 ( ) Fraise carbure, 3 dents, à jeter, courte  
 ( ) 3 TAGLIENTI, SERIE EXTRA CORTA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 3 flute design possesses the advantage of 2 flute and 4 flute end mill.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.

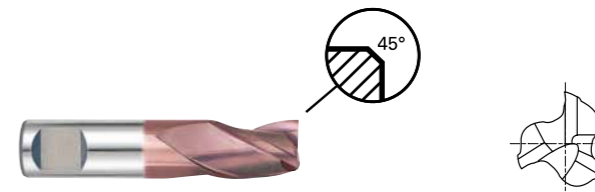

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
<b>G9G46030</b>	<b>3.0</b>	6	5	36	0.1
<b>G9G46040</b>	<b>4.0</b>	6	7	38	0.1
<b>G9G46050</b>	<b>5.0</b>	6	8	39	0.1
<b>G9G46060</b>	<b>6.0</b>	6	8	39	0.1
<b>G9G46080</b>	<b>8.0</b>	8	11	43	0.13
<b>G9G46100</b>	<b>10.0</b>	10	13	50	0.13
<b>G9G46120</b>	<b>12.0</b>	12	15	55	0.18
<b>G9G46140</b>	<b>14.0</b>	14	15	58	0.18
<b>G9G46160</b>	<b>16.0</b>	16	18	62	0.18
<b>G9G46200</b>	<b>20.0</b>	20	22	75	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 3 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 3 SCHNEIDEN KURZ
- ( ) Fraise carbure, 3 dents, courte
- ( ) 3 TAGLIANTI, SERIE CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design possesses the advantage of 2 flute and 4 flute end mill.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9425010	1.0	4	3	40
G9425015	1.5	4	4.5	40
G9425020	2.0	2	8	32
G9425025	2.5	3	8	32
G9425030	3.0	3	12	32
G9425035	3.5	4	12	32
G9425040	4.0	4	12	40
G9425045	4.5	5	14	50
G9425050	5.0	5	14	50
G9425055	5.5	6	16	50
G9425060	6.0	6	16	50
G9425070	7.0	7	20	60
G9425080	8.0	8	20	60
G9425090	9.0	9	20	60
G9425100	10.0	10	22	70
G9425120	12.0	12	22	70
G9425140	14.0	14	25	75
G9425160	16.0	16	25	75
G9425200	20.0	20	32	100

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 3 FLUTE SHORT LENGTH WITH CHAMFER**

- VOLLHARTMETALL, 3 SCHNEIDEN KURZ
- ( ) Fraise carbure, 3 dents, courte
- ( ) 3 TAGLIANTI, SERIE CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design possesses the advantage of 2 flute and 4 flute end mill.


- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.

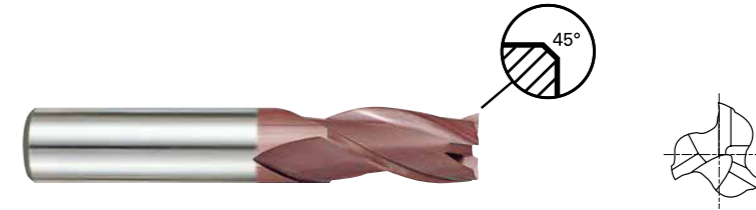

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G47030	3.0	3	12	32	0.1
G9G47040	4.0	4	12	40	0.1
G9G47050	5.0	5	14	50	0.1
G9G47060	6.0	6	16	50	0.1
G9G47080	8.0	8	20	60	0.13
G9G47100	10.0	10	22	70	0.13
G9G47120	12.0	12	22	70	0.18
G9G47140	14.0	14	25	75	0.18
G9G47160	16.0	16	25	75	0.18
G9G47200	20.0	20	32	100	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

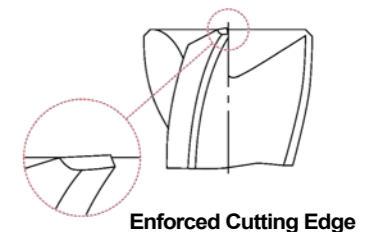

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 3 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 3 SCHNEIDEN KURZ
- ( ) Fraise carbure, 3 dents, courte
- ( ) 3 TAGLIANTI, SERIE CORTA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 3 flute design possesses the advantage of 2 flute and 4 flute end mill.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9439020	2.0	6	3	50
G9439030	3.0	6	4	50
G9439035	3.5	6	4	50
G9439040	4.0	6	5	54
G9439045	4.5	6	5	54
G9439050	5.0	6	6	54
G9439060	6.0	6	7	54
G9439070	7.0	8	8	58
G9439080	8.0	8	9	58
G9439090	9.0	10	10	66
G9439100	10.0	10	11	66
G9439120	12.0	12	12	73
G9439140	14.0	14	14	75
G9439160	16.0	16	16	82
G9439180	18.0	18	18	84
G9439200	20.0	20	20	92

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 3 FLUTE LONG LENGTH**

- VOLLHARTMETALL, 3 SCHNEIDEN LANG
- ( ) Fraise carbure, 3 dents, longue
- ( ) 3 TAGLIANTI, SERIE LUNGA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 3 flute design possesses the advantage of 2 flute and 4 flute end mill.

- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9528035	3.5	3.5	7	50
G9528040	4.0	4	8	50
G9528045	4.5	4.5	8	50
G9528050	5.0	5	10	50
G9528055	5.5	5.5	10	57
G9528060	6.0	6	10	57
G9528065	6.5	6.5	13	60
G9528070	7.0	7	13	60
G9528075	7.5	7.5	16	63
G9528080	8.0	8	16	63
G9528085	8.5	8.5	16	67
G9528090	9.0	9	16	67
G9528095	9.5	9.5	19	72
G9528100	10.0	10	19	72
G9528110	11.0	11	22	83
G9528120	12.0	12	22	83
G9528130	13.0	13	22	83
G9528140	14.0	14	22	83
G9528150	15.0	15	26	92
G9528160	16.0	16	26	92
G9528180	18.0	18	26	92
G9528200	20.0	20	32	104

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	200	325	200	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




FLAT SHANK **G9433** SERIES

**CARBIDE, 3 FLUTE LONG LENGTH**

● **VOLLHARTMETALL, 3 SCHNEIDEN LANG**  
 (●) **Fraise carbure, 3 dents, longue**  
 (●) **3 TAGLIANTI, SERIE LUNGA**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design possesses the advantage of 2 flute and 4 flute end mill.

- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9433030	3.0	6	7	57
G9433040	4.0	6	8	57
G9433050	5.0	6	10	57
G9433060	6.0	6	10	57
G9433080	8.0	8	16	63
G9433090	9.0	10	16	72
G9433100	10.0	10	19	72
G9433120	12.0	12	22	83
G9433140	14.0	14	22	83
G9433160	16.0	16	26	92
G9433180	18.0	18	26	92
G9433200	20.0	20	32	104

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	400	200	325	200	240	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



FLAT SHANK **G9G48** SERIES

**CARBIDE, 3 FLUTE LONG LENGTH WITH CHAMFER**

● **VOLLHARTMETALL, 3 SCHNEIDEN LANG**  
 (●) **Fraise carbure, 3 dents, longue**  
 (●) **3 TAGLIANTI, SERIE LUNGA**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design possesses the advantage of 2 flute and 4 flute end mill.


- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G48030	3.0	6	7	57	0.10
G9G48040	4.0	6	8	57	0.10
G9G48050	5.0	6	10	57	0.10
G9G48060	6.0	6	10	57	0.10
G9G48080	8.0	8	16	63	0.13
G9G48100	10.0	10	19	72	0.13
G9G48120	12.0	12	22	83	0.18
G9G48140	14.0	14	22	83	0.18
G9G48160	16.0	16	26	92	0.18
G9G48200	20.0	20	32	104	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

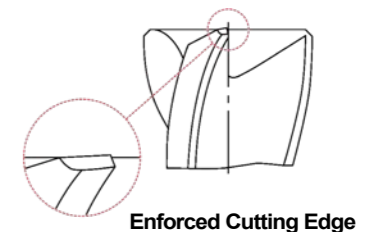

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	45	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	400	200	325	200	240	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 3 FLUTE 45° HELIX, LONG LENGTH**

● VOLLHARTMETALL, 3 SCHNEIDEN 45° RECHTSSPIRALE LANG  
 ( ) Fraise carbure, 3 dents, hélice 45°, longue  
 ( ) 3 TAGLIENTI, ELICA 45°, SERIE LUNGA

▶ Suitable for dry milling applications at high temperatures.  
 ▶ Excellent high-performance end mills.

▶ Für die Trockenbearbeitung.  
 ▶ Hervorragendes Preis - Leistungsverhältnis.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9447030	3.0	6	7	57
G9447035	3.5	6	7	57
G9447040	4.0	6	8	57
G9447045	4.5	6	8	57
G9447050	5.0	6	10	57
G9447060	6.0	6	10	57
G9447070	7.0	8	13	63
G9447080	8.0	8	16	63
G9447090	9.0	10	16	72
G9447100	10.0	10	19	72
G9447120	12.0	12	22	83
G9447140	14.0	14	22	83
G9447160	16.0	16	26	92
G9447180	18.0	18	26	92
G9447200	20.0	20	32	104

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

**CARBIDE, 3 FLUTE 45° HELIX, LONG LENGTH WITH CHAMFER**

● VOLLHARTMETALL, 3 SCHNEIDEN 45° RECHTSSPIRALE LANG  
 ( ) Fraise carbure, 3 dents, hélice 45°, longue  
 ( ) 3 TAGLIENTI, ELICA 45°, SERIE LUNGA

▶ Suitable for dry milling applications at high temperatures.  
 ▶ Excellent high-performance end mills.


▶ Für die Trockenbearbeitung.  
 ▶ Hervorragendes Preis - Leistungsverhältnis.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G49030	3.0	6	7	57	0.10
G9G49040	4.0	6	8	57	0.10
G9G49050	5.0	6	10	57	0.10
G9G49060	6.0	6	10	57	0.10
G9G49080	8.0	8	16	63	0.13
G9G49100	10.0	10	19	72	0.13
G9G49120	12.0	12	22	83	0.18
G9G49140	14.0	14	22	83	0.18
G9G49160	16.0	16	26	92	0.18
G9G49200	20.0	20	32	104	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

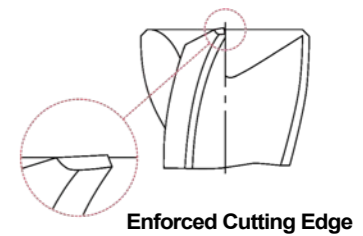

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 4 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 4 SCHNEIDEN KURZ
- ( ) Fraise carbure, 4 dents, courte
- ( ) 4 TAGLIANTI, CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9432010	1.0	4	3	40
G9432015	1.5	4	4.5	40
G9432020	2.0	2	8	32
G9432025	2.5	2.5	8	32
G9432030	3.0	3	12	32
G9432035	3.5	3.5	12	32
G9432040	4.0	4	12	40
G9432045	4.5	4.5	14	50
G9432050	5.0	5	14	50
G9432055	5.5	5.5	16	50
G9432060	6.0	6	16	50
G9432070	7.0	7	20	60
G9432080	8.0	8	20	60
G9432090	9.0	9	20	60
G9432100	10.0	10	22	70
G9432120	12.0	12	22	70
G9432140	14.0	14	25	75
G9432160	16.0	16	25	75
G9432200	20.0	20	32	100

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron	Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 4 FLUTE SHORT LENGTH WITH CHAMFER**

- VOLLHARTMETALL, 4 SCHNEIDEN KURZ
- ( ) Fraise carbure, 4 dents, courte
- ( ) 4 TAGLIANTI, CORTA


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G50030	3.0	3	12	32	0.10
G9G50040	4.0	4	12	40	0.10
G9G50050	5.0	5	14	50	0.10
G9G50060	6.0	6	16	50	0.10
G9G50080	8.0	8	20	60	0.13
G9G50100	10.0	10	22	70	0.13
G9G50120	12.0	12	22	70	0.18
G9G50140	14.0	14	25	75	0.18
G9G50160	16.0	16	25	75	0.18
G9G50200	20.0	20	32	100	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

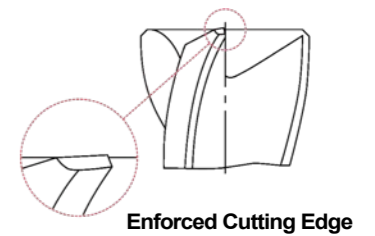

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron	Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 4 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 4 SCHNEIDEN KURZ
- ( ) Fraise carbure, 4 dents, courte
- ( ) 4 TAGLIANTI, CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9A69010	1.0	3	3	39
G9A69015	1.5	3	5	39
G9A69020	2.0	3	7	39
G9A69025	2.5	3	7	39
G9A69030	3.0	3	10	39
G9A69040	4.0	4	14	51
G9A69050	5.0	5	16	51
G9A69060	6.0	6	19	64
G9A69080	8.0	8	21	64
G9A69100	10.0	10	22	70
G9A69120	12.0	12	25	76
G9A69160	16.0	16	32	89
G9A69200	20.0	20	38	102

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 4 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 4 SCHNEIDEN KURZ
- ( ) Fraise carbure, 4 dents, courte
- ( ) 4 TAGLIANTI, SERIE CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9448020	2.0	6	4	50
G9448025	2.5	6	4	50
G9448030	3.0	6	5	50
G9448035	3.5	6	6	50
G9448040	4.0	6	8	54
G9448045	4.5	6	8	54
G9448050	5.0	6	9	54
G9448060	6.0	6	10	54
G9448070	7.0	8	11	58
G9448080	8.0	8	12	58
G9448090	9.0	10	13	66
G9448100	10.0	10	14	66
G9448120	12.0	12	16	73
G9448140	14.0	14	18	75
G9448160	16.0	16	22	82
G9448180	18.0	18	24	84
G9448200	20.0	20	26	92

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



**CARBIDE, 4 FLUTE LONG LENGTH**

- VOLLHARTMETALL, 4 SCHNEIDEN LANG
- ( ) Fraise carbure, 4 dents, longue
- ( ) 4 TAGLIANTI, SERIE LUNGA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.



CARBIDE DIN 6528 4  $\approx 30^\circ$  DIN 6535HA P.608

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9540035	3.5	3.5	10	50
G9540040	4.0	4	11	50
G9540045	4.5	4.5	11	50
G9540050	5.0	5	13	50
G9540055	5.5	5.5	13	57
G9540060	6.0	6	13	57
G9540065	6.5	6.5	16	60
G9540070	7.0	7	16	60
G9540075	7.5	7.5	19	63
G9540080	8.0	8	19	63
G9540085	8.5	8.5	19	67
G9540090	9.0	9	19	67
G9540095	9.5	9.5	22	72
G9540100	10.0	10	22	72
G9540110	11.0	11	26	83
G9540120	12.0	12	26	83
G9540130	13.0	13	26	83
G9540140	14.0	14	26	83
G9540150	15.0	15	32	92
G9540160	16.0	16	32	92
G9540180	18.0	18	32	92
G9540200	20.0	20	38	104

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	400	200	325	350	400	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

**CARBIDE, 4 FLUTE LONG LENGTH**

- VOLLHARTMETALL, 4 SCHNEIDEN LANG
- ( ) Fraise carbure, 4 dents, longue
- ( ) 4 TAGLIANTI, SERIE LUNGA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.



CARBIDE DIN 6527 4  $\approx 30^\circ$  DIN 6535HB DIN 6535HA P.608

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9449901	2.0	● 3	7	38
G9449030	3.0	6	8	57
G9449035	3.5	6	10	57
G9449040	4.0	6	11	57
G9449045	4.5	6	11	57
G9449050	5.0	6	13	57
G9449060	6.0	6	13	57
G9449070	7.0	8	16	63
G9449080	8.0	8	19	63
G9449090	9.0	10	19	72
G9449100	10.0	10	22	72
G9449120	12.0	12	26	83
G9449140	14.0	14	26	83
G9449160	16.0	16	32	92
G9449180	18.0	18	32	92
G9449200	20.0	20	38	104

● with plain shank

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	38	10	29	32	38	45	15	35	40	48	10	26	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	400	200	325	350	400	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

**CARBIDE, 4 FLUTE LONG LENGTH WITH CHAMFER**

● VOLLHARTMETALL, 4 SCHNEIDEN LANG  
 ( ) Fraise carbure, 4 dents, longue  
 ( ) 4 TAGLIENTI, SERIE LUNGA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 4 flute allows for better work piece finishes.
- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.

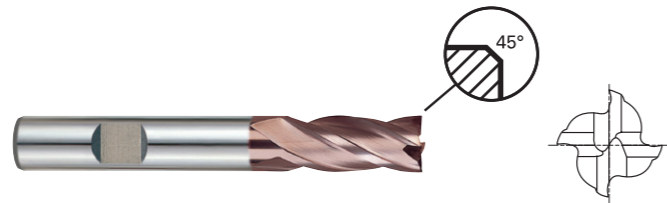


CARBIDE DIN 6527 4 30° DIN 6535HB C x 45° P.608

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G51030	3.0	6	8	57	0.10
G9G51040	4.0	6	11	57	0.10
G9G51050	5.0	6	13	57	0.10
G9G51060	6.0	6	13	57	0.10
G9G51080	8.0	8	19	63	0.13
G9G51100	10.0	10	22	72	0.13
G9G51120	12.0	12	26	83	0.18
G9G51140	14.0	14	26	83	0.18
G9G51160	16.0	16	32	92	0.18
G9G51200	20.0	20	38	104	0.23

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 4 FLUTE EXTRA LONG LENGTH**

● VOLLHARTMETALL, 4 SCHNEIDEN EXTRA LANG  
 ( ) Fraise carbure, 4 dents, extra-longue  
 ( ) 4 TAGLIENTI, SERIE EXTRA LUNGA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 4 flute allows for better work piece finishes.
- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- 4 Schneiden erzeugen eine bessere Oberflächengüte des Werkstücks.



CARBIDE 4 30° DIN 6535HA P.608

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9453903	3.0	3	20	60
G9453030	3.0	3	30	75
G9453904	4.0	4	20	60
G9453040	4.0	4	30	75
G9453905	5.0	5	25	75
G9453050	5.0	5	40	100
G9453906	6.0	6	30	75
G9453060	6.0	6	50	150
G9453908	8.0	8	30	75
G9453080	8.0	8	50	150
G9453910	10.0	10	40	100
G9453100	10.0	10	60	150
G9453912	12.0	12	45	100
G9453120	12.0	12	75	150
G9453914	14.0	14	45	100
G9453140	14.0	14	65	150
G9453916	16.0	16	45	100
G9453160	16.0	16	65	150
G9453918	18.0	18	45	100
G9453180	18.0	18	65	150
G9453920	20.0	20	45	100
G9453200	20.0	20	65	150

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	10	26	3	25	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

**CARBIDE, 4&6 FLUTE 45° HELIX SHORT / LONG LENGTH**

● VOLLHARTMETALL, 4&6 SCHNEIDEN 45° RECHTSSPIRALE KURZ / LANG  
 ( ) Fraise carbure, 4&6 dents, hélice 45°, courte / longue  
 ( ) 4&6 TAGLIANTI, ELICA 45°, SERIE CORTA / LUNGA

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Für die Trockenbearbeitung geeignet.
- Exzellente Hochleistungs Mühlen.



**SHORT**

Unit : mm


EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
G9F45030	3.0	4	6	50	4
G9F45040	4.0	4	11	50	4
G9F45050	5.0	6	13	50	6
G9F45060	6.0	6	16	50	6
G9F45080	8.0	8	19	60	6
G9F45100	10.0	10	22	75	6
G9F45120	12.0	12	26	75	6
G9F45140	14.0	14	30	90	6
G9F45160	16.0	16	32	100	6
G9F45180	18.0	18	38	100	6
G9F45000	20.0	20	38	100	6

**LONG**

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
G9F46120	12.0	12	50	100	6
G9F46160	16.0	16	65	150	6
G9F46200	20.0	20	75	150	6

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	○	○	○	○	○	○	◎	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, MULTI FLUTE LONG LENGTH ROUGHING - COARSE**

● VOLLHARTMETALL, MEHRSCHEIDEN LANG SCHRUPPFRÄSER - GROB  
 ( ) Fraise carbure, multi-dents, ébauche, pas grossier, longue  
 ( ) 3 - 4 - 5 TAGLIANTI, PER SGROSSATURA, SERIE LUNGA - Bombato grosso

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Fast chip ejection.
- Für die Trockenbearbeitung.
- Hervorragendes Preis - Leistungsverhältnis.
- Guter Spanauswurf.

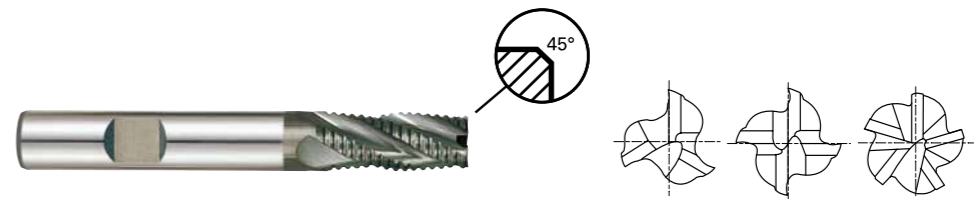


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer
	h10	h5				
G9A42060	6.0	6	16	57	3.00	0.60
G9A42080	8.0	8	16	63	3.00	0.60
G9A42100	10.0	10	22	72	4.00	0.60
G9A42120	12.0	12	26	83	4.00	0.74
G9A42140	14.0	14	26	83	4.00	0.94
G9A42160	16.0	16	32	92	4.00	0.94
G9A42180	18.0	18	32	92	4.00	0.94
G9A42200	20.0	20	38	104	4.00	0.94
G9A42250	25.0	25	45	121	5.00	0.94

Tolerances according to DIN 7160 & 7161

	Tolerance range in μm				
	Nominal-Diameter in mm				
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 - 40	0 - 48	0 - 58	0 - 70	0 - 84
h5	0 - 4	0 - 5	0 - 6	0 - 8	0 - 9

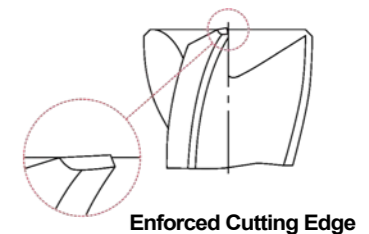

Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**CARBIDE, 2 FLUTE DRILL MILLS**

**● VOLLHARTMETALL, 2 SCHNEIDEN BOHRNUTEN FRÄSER**  
**○ Fraise foret carbure, 2 dents, multi-fonctions**  
**○ 2 TAGLIANTI, FRESA IN MD A 90°**




EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9400030	3.0	4	6	50
G9400040	4.0	5	8	50
G9400050	5.0	6	10	50
G9400060	6.0	8	12	60
G9400080	8.0	10	16	70
G9400100	10.0	12	18	70
G9400120	12.0	12	20	70
G9400140	14.0	14	24	80
G9400160	16.0	16	26	80
G9400200	20.0	20	32	100

Unit : mm

►TiN, TiCN and TiAlN Coatings are available on your request.

- Performs many drilling and milling operations that are not presently done with the standard end mill.
- Among the many vertical milling machine operations, applications for the Drill Mill are: Drilling, Slotting, NC Milling, Drilling & Slotting, Profile Milling and Chamfering.

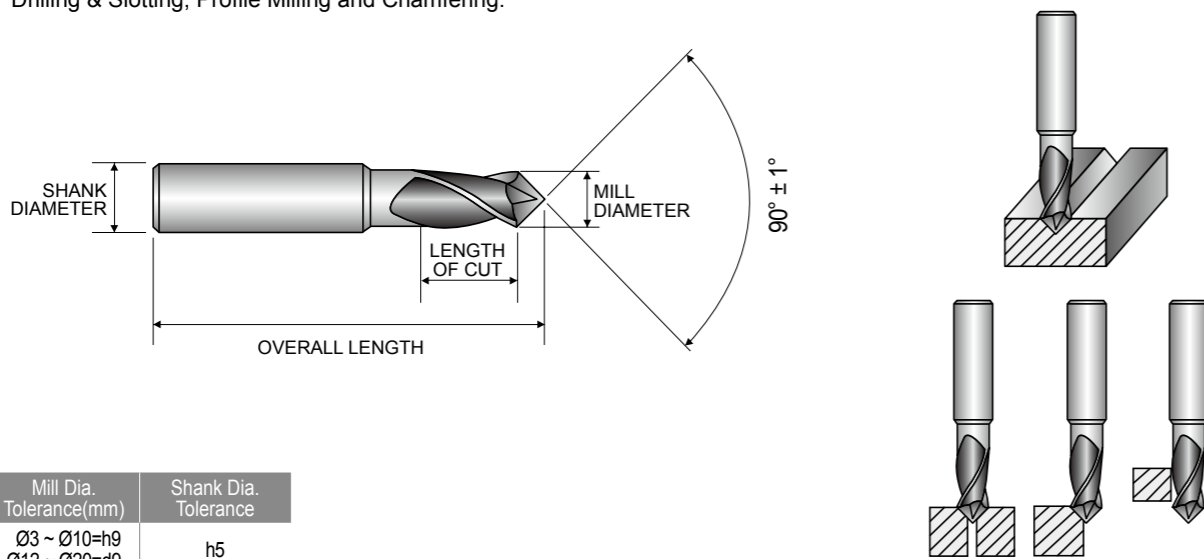

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
Ø3 ~ Ø10=h9 Ø12 ~ Ø20=d9	h5

ISO	P														M				K					
Material Description	Non-alloy steel				Low alloy steel				High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10		10	26	3	25	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	○	○				
ISO	N				S						H													
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550			
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			

◎ : Excellent ○ : Good


**RECOMMENDED CUTTING CONDITIONS**  
**EMFOHLENE SCHNEIDPARAMETER**

**G9624, G9A70, G9437, G9438, G9454, G9455 SERIES 2 FLUTE BALL NOSE**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.  
Ap = mm

ISO	VDI 3323	Material Description	Ae	Parameter	Mill Diameter (Ø)											
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
P	1-4	Non-alloy steel	0.2D	Vc	80	105	110	125	135	155	170	190	200	205	215	225
				fz	0.026	0.025	0.035	0.045	0.06	0.089	0.122	0.15	0.165	0.18	0.188	0.201
				RPM	12732	11141	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581
				FEED	662	557	613	716	859	1098	1320	1512	1501	1468	1430	1440
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
	5	0.2D	Vc	55	80	90	95	110	125	135	150	160	160	170	175	
			fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158	
			RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785	
			FEED	403	390	444	484	700	796	859	955	931	898	890	880	
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
	6-7	Low alloy steel	0.2D	Vc	80	105	110	125	135	155	170	190	200	205	215	225
				fz	0.026	0.025	0.035	0.045	0.06	0.089	0.122	0.15	0.165	0.18	0.188	0.201
RPM				12732	11141	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581	
FEED				662	557	613	716	859	1098	1320	1512	1501	1468	1430	1440	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
8-9	0.2D	Vc	55	80	90	95	110	125	135	150	160	160	170	175		
		fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158		
		RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785		
		FEED	403	390	444	484	700	796	859	955	931	898	890	880		
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
10	High alloyed steel, and tool steel	0.2D	Vc	80	105	110	125	135	155	170	190	200	205	215	225	
			fz	0.026	0.025	0.035	0.045	0.06	0.089	0.122	0.15	0.165	0.18	0.188	0.201	
			RPM	12732	11141	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581	
			FEED	662	557	613	716	859	1098	1320	1512	1501	1468	1430	1440	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
11.1 11.2	0.2D	Vc	55	80	90	95	110	125	135	150	160	160	170	175		
		fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158		
		RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785		
		FEED	403	390	444	484	700	796	859	955	931	898	890	880		
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.7D	Vc	65	65	65	65	65	65	65	65	60	65	60	65
				fz	0.01	0.016	0.028	0.04	0.053	0.092	0.112	0.131	0.164	0.177	0.209	0.2
				RPM	10345	6897	5173	4138	3448	2586	2069	1724	1364	1293	1061	1035
				FEED	207	221	290	331	366	476	463	452	447	458	444	414
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
N	21~22	Aluminum-wrought alloy	0.7D	Vc	195	195	195	190	195	200	195	195	190	195	190	185
				fz	0.006	0.01	0.013	0.019	0.023	0.034	0.044	0.061	0.073	0.07	0.079	0.092
				RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944
				FEED	372	414	403	460	476	541	546	631	631	543	531	542
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
23~25	Aluminum-cast, alloyed	0.7D	Vc	195	195	195	190	195	200	195	195	190	195	190	185	
			fz	0.006	0.01	0.013	0.019	0.023	0.034	0.044	0.061	0.073	0.07	0.079	0.092	
			RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944	
			FEED	372	414	403	460	476	541	546	631	631	543	531	542	
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
H	38.1	Hardened steel	0.2D	Vc	25	35	45	50	50	50	55	55	55	60	60	60
				fz	0.016	0.016	0.021	0.024	0.03	0.046	0.054	0.07	0.081	0.091	0.1	0.111
				RPM	3979	3714	3581	3183	2653	1989	1751	1459	1251	1194	1061	955
				FEED	127	119	150	153	159	183	189	204	203	217	212	212
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3				
40	Chilled Cast Iron	0.2D	Vc	55	80	90	95	110	125	135	150	160	160	170	175	
			fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158	
			RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785	
			FEED	403	390	444	484	700	796	859	955	931	898	890	880	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3				

※ The FEED, in long & extra long types, should be reduced by around 50%





**RECOMMENDED CUTTING CONDITIONS**  
**EMPFOHLENE SCHNEIDPARAMETER**


**G9B81 SERIES 2 FLUTE BALL NOSE**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.  
Ap = mm

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)				
				0.4	0.5	0.6	0.8	1.0
P	1-4	Non-alloy steel	Vc	33~43	41~53	50~64	66~85	77~97
			fz	0.003~0.006	0.003~0.006	0.004~0.008	0.004~0.008	0.004~0.010
			RPM	26350~34000	26350~34000	26350~34000	26350~34000	24650~31000
			FEED	150~415	150~415	190~535	190~535	210~595
	5	Non-alloy steel	Vc	24~30	30~38	36~46	48~61	55~69
			fz	0.002~0.005	0.002~0.005	0.002~0.006	0.002~0.006	0.003~0.007
			RPM	19100~24200	19100~24200	19100~24200	19100~24200	17400~22100
			FEED	75~230	75~230	95~300	95~300	105~330
	6-7	Low alloy steel	Vc	33~43	41~53	50~64	66~85	77~97
			fz	0.003~0.006	0.003~0.006	0.004~0.008	0.004~0.008	0.004~0.010
			RPM	26350~34000	26350~34000	26350~34000	26350~34000	24650~31000
			FEED	150~415	150~415	190~535	190~535	210~595
8-9	Low alloy steel	Vc	24~30	30~38	36~46	48~61	55~69	
		fz	0.002~0.005	0.002~0.005	0.002~0.006	0.002~0.006	0.003~0.007	
		RPM	19100~24200	19100~24200	19100~24200	19100~24200	17400~22100	
		FEED	75~230	75~230	95~300	95~300	105~330	
10	High alloyed steel, and tool steel	Vc	33~43	41~53	50~64	66~85	77~97	
		fz	0.003~0.006	0.003~0.006	0.004~0.008	0.004~0.008	0.004~0.010	
		RPM	26350~34000	26350~34000	26350~34000	26350~34000	24650~31000	
		FEED	150~415	150~415	190~535	190~535	210~595	
11.1 - 11.2	High alloyed steel, and tool steel	Vc	24~30	30~38	36~46	48~61	55~69	
		fz	0.002~0.005	0.002~0.005	0.002~0.006	0.002~0.006	0.003~0.007	
		RPM	19100~24200	19100~24200	19100~24200	19100~24200	17400~22100	
		FEED	75~230	75~230	95~300	95~300	105~330	

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE

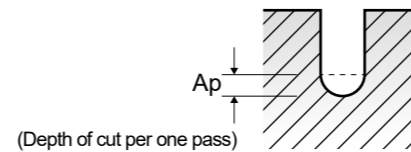


**RECOMMENDED CUTTING CONDITIONS**  
**EMPFOHLENE SCHNEIDPARAMETER**

**G9B81 SERIES 2 FLUTE BALL NOSE**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.  
Ap = mm

VDI 3323	Parameter	Mill Diameter (Ø)							
		1.2	1.4	1.5	1.6	1.8	2.0	3.0	4.0
1-4	Vc	77~98	79~97	75~97	78~101	82~103	82~101	85~104	90~117
	fz	0.005~0.013	0.006~0.015	0.007~0.016	0.007~0.017	0.007~0.018	0.008~0.021	0.012~0.030	0.015~0.036
	RPM	20500~26000	18000~22000	16000~20500	15500~20000	14500~18200	13000~16000	9000~11000	7200~9350
	FEED	210~665	210~665	210~665	210~665	210~665	210~665	210~665	210~665
5	Vc	55~69	56~67	54~70	56~70	58~72	59~72	57~108	63~83
	fz	0.004~0.009	0.004~0.011	0.005~0.011	0.005~0.012	0.005~0.013	0.006~0.014	0.009~0.014	0.011~0.025
	RPM	14500~18300	12800~15300	11500~14900	11200~14000	10200~12800	9400~11500	6000~11500	5000~6600
	FEED	105~330	105~330	105~330	105~330	105~330	105~330	105~330	105~330
6-7	Vc	77~98	79~97	75~97	78~101	82~103	82~101	85~104	90~117
	fz	0.005~0.013	0.006~0.015	0.007~0.016	0.007~0.017	0.007~0.018	0.008~0.021	0.012~0.030	0.015~0.036
	RPM	20500~26000	18000~22000	16000~20500	15500~20000	14500~18200	13000~16000	9000~11000	7200~9350
	FEED	210~665	210~665	210~665	210~665	210~665	210~665	210~665	210~665
8-9	Vc	55~69	56~67	54~70	56~70	58~72	59~72	57~108	63~83
	fz	0.004~0.009	0.004~0.011	0.005~0.011	0.005~0.012	0.005~0.013	0.006~0.014	0.009~0.014	0.011~0.025
	RPM	14500~18300	12800~15300	11500~14900	11200~14000	10200~12800	9400~11500	6000~11500	5000~6600
	FEED	105~330	105~330	105~330	105~330	105~330	105~330	105~330	105~330
10	Vc	77~98	79~97	75~97	78~101	82~103	82~101	85~104	90~117
	fz	0.005~0.013	0.006~0.015	0.007~0.016	0.007~0.017	0.007~0.018	0.008~0.021	0.012~0.030	0.015~0.036
	RPM	20500~26000	18000~22000	16000~20500	15500~20000	14500~18200	13000~16000	9000~11000	7200~9350
	FEED	210~665	210~665	210~665	210~665	210~665	210~665	210~665	210~665
11.1 - 11.2	Vc	55~69	56~67	54~70	56~70	58~72	59~72	57~108	63~83
	fz	0.004~0.009	0.004~0.011	0.005~0.011	0.005~0.012	0.005~0.013	0.006~0.014	0.009~0.014	0.011~0.025
	RPM	14500~18300	12800~15300	11500~14900	11200~14000	10200~12800	9400~11500	6000~11500	5000~6600
	FEED	105~330	105~330	105~330	105~330	105~330	105~330	105~330	105~330

※ The FEED, in long & extra long types, should be reduced by around 50%

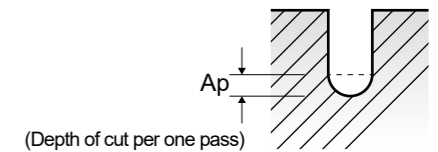


**G9634 SERIES 4 FLUTE BALL NOSE**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Parameter	Mill Diameter (Ø)													
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0		
P	1-4	Non-alloy steel	0.2D	Vc	85	110	110	125	135	155	170	190	200	205	215	225		
				fz	0.013	0.019	0.027	0.033	0.046	0.068	0.089	0.112	0.124	0.136	0.14	0.15		
				RPM	13528	11671	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581		
				FEED	703	887	945	1050	1318	1677	1926	2258	2255	2219	2129	2149		
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
				Vc	65	80	90	95	110	125	135	150	160	160	170	175		
	5	Non-alloy steel	0.2D	fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119		
				RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785		
				FEED	414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326		
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
				Vc	85	110	110	125	135	155	170	190	200	205	215	225		
				fz	0.013	0.019	0.027	0.033	0.046	0.068	0.089	0.112	0.124	0.136	0.14	0.15		
6-7	Low alloy steel	0.2D	RPM	13528	11671	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581			
			FEED	703	887	945	1050	1318	1677	1926	2258	2255	2219	2129	2149			
			Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
			Vc	65	80	90	95	110	125	135	150	160	160	170	175			
			fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119			
			RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785			
8-9	Low alloy steel	0.2D	FEED	414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326			
			Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
			Vc	85	110	110	125	135	155	170	190	200	205	215	225			
			fz	0.013	0.019	0.027	0.033	0.046	0.068	0.089	0.112	0.124	0.136	0.14	0.15			
			RPM	13528	11671	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581			
			FEED	703	887	945	1050	1318	1677	1926	2258	2255	2219	2129	2149			
10	High alloyed steel, and tool steel	0.2D	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
			Vc	65	80	90	95	110	125	135	150	160	160	170	175			
			fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119			
			RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785			
			FEED	414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326			
			Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
11.1 - 11.2	High alloyed steel, and tool steel	0.2D	Vc	85	110	110	125	135	155	170	190	200	205	215	225			
			fz	0.013	0.019	0.027	0.033	0.046	0.068	0.089	0.112	0.124	0.136	0.14	0.15			
			RPM	13528	11671	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581			
			FEED	703	887	945	1050	1318	1677	1926	2258	2255	2219	2129	2149			
			Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
			Vc	65	80	90	95	110	125	135	150	160	160	170	175			
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.7D	fz	0.008	0.012	0.021	0.03	0.04	0.068	0.083	0.097	0.125	0.135	0.159	0.15		
				RPM	10345	6897	5173	4138	3448	2586	2069	1724	1364	1293	1061	1035		
				FEED	331	331	434	497	552	703	687	669	682	698	675	621		
				Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
				Vc	195	195	195	190	195	200	195	195	190	195	190	185		
				fz	0.005	0.007	0.01	0.015	0.017	0.026	0.033	0.046	0.055	0.053	0.06	0.069		
N	21~22	Aluminum-wrought alloy	0.7D	RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944		
				FEED	621	579	621	726	703	828	819	952	950	822	806	813		
				Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
	23~25	Aluminum-cast, alloyed	0.7D	Vc	195	195	195	190	195	200	195	195	190	195	190	185		
				fz	0.005	0.007	0.01	0.015	0.017	0.026	0.033	0.046	0.055	0.053	0.06	0.069		
				RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944		
H	38.1	Hardened steel	0.2D	FEED	621	579	621	726	703	828	819	952	950	822	806	813		
				Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
				Vc	25	35	45	50	50	55	55	55	55	55	60	60		
	40	Chilled Cast Iron	0.2D	fz	0.008	0.012	0.016	0.019	0.022	0.034	0.041	0.053	0.062	0.073	0.076	0.084		
				RPM	3979	3714	3581	3183	2653	2188	1751	1459	1251	1094	1061	955		
				FEED	127	178	229	242	233	298	287	309	310	320	323	321		
H	40	Chilled Cast Iron	0.2D	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
				Vc	65	80	90	95	110	125	135	150	160	160	170	175		
				fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119		
				RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785		
				FEED	414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326		
				Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3		

※ The FEED, in long & extra long types, should be reduced by around 50%



**G9B82, G9B83 SERIES 2 FLUTE CORNER RADIUS - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)										
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0			
P	1-4	Non-alloy steel	1.0D (Up to Ø3 : 0.2D)	0.5D (Up to Ø3 : 0.2D)	Vc	50	55	65	70	70	70	70	70	70		
					fz	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065			
					RPM	7958	5836	5173	4456	3714	2785	2228	1857			
					FEED	159	175	259	276	290	318	285	241			
					Vc	30	35	40	40	45	45	40	45			
					fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048			
	5	Non-alloy steel	1.0D (Up to Ø3 : 0.2D)	RPM	4775	3714	3183	2546	2387	1790	1273	1194				
				FEED	95	119	159	158	196	179	127	115				
				Vc	50	55	65	70	70	70	70	70				
				fz	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065				
				RPM	7958	5836	5173	4456	3714	2785	2228	1857				
				FEED	159	175	259	276	290	318	285	241				
6-7	Low alloy steel	1.0D (Up to Ø3 : 0.2D)	Vc	30	35	40	40	45	45	40	45					
			fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048					
			RPM	4775	3714	3183	2546	2387	1790	1273	1194					
			FEED	95	119	159	158	196	179	127	115					
			Vc	50	55	65	70	70	70	70	70					
			fz	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065					
8-9	Low alloy steel	1.0D (Up to Ø3 : 0.2D)	RPM	7958	5836	5173	4456	3714	2785	2228	1857					
			FEED	159	175	259	276	290	318	285	241					
			Vc	30	35	40	40	45	45	40	45					
			fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048					
			RPM	4775	3714	3183	2546	2387	1790	1273	1194					
			FEED	95	119	159	158	196	179	127	115					
10	High alloyed steel, and tool steel	1.0D (Up to Ø3 : 0.2D)	Vc	50	55	65	70	70	70	70	70					
			fz	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065					
			RPM	7958	5836	5173	4456	3714	2785	2228	1857					
			FEED	159	175	259	276	290	318	285	241					
			Vc	30	35	40	40	45	45	40	45					
			fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048					
11.1 - 11.2	High alloyed steel, and tool steel	1.0D (Up to Ø3 : 0.2D)	RPM	4775	3714	3183	2546	2387	1790	1273	1194					
			FEED	95	119	159	158	196	179	127	115					
			Vc	25	30	35	35	35	35	35	35					
			fz	0.009	0.016	0.025	0.031	0.04	0.053	0.059	0.058					
			RPM	3979	3183	2785	2228	1857	1393	1114	928					
			FEED	72	102	139	138	149	148	131	108					
M	14.1	Stainless steel	1.0D (Up to Ø3 : 0.2D)	0.5D (Up to Ø3 : 0.2D)	Vc	60	55	60	55	55	55	60	55			
					fz	0.012	0.018	0.024	0							

## G9B84, G9B85 SERIES 4 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)									
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
<b>P</b>	1-4	Non-alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047
	RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387				
	FEED	140	233	229	267	484	519	554	616	509	449				
	5	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55		
				fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	
	RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459				
	FEED	76	119	153	172	302	306	362	333	266	216				
	6-7	Low alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047
	RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387				
	FEED	140	233	229	267	484	519	554	616	509	449				
8-9	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55			
			fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037		
RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459					
FEED	76	119	153	172	302	306	362	333	266	216					
10	High alloyed steel, and tool steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	
				fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	
RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387					
FEED	140	233	229	267	484	519	554	616	509	449					
11.1 - 11.2	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55			
			fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037		
RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459					
FEED	76	119	153	172	302	306	362	333	266	216					
<b>M</b>	14.1	Stainless steel	0.1D	1.0D	Vc	25	35	35	40	40	45	45	45		
fz	0.002	0.004	0.006	0.009	0.018	0.024	0.029	0.042	0.044	0.045					
RPM	7958	7427	5570	3714	3183	2546	2387	1790	1432	1194					
FEED	64	119	134	134	229	244	277	301	252	215					
<b>K</b>	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.1D	1.5D	Vc	60	55	60	55	60	55	55	60	55	
fz	0.008	0.013	0.017	0.026	0.035	0.044	0.065	0.093	0.116	0.155					
RPM	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459					
FEED	611	607	649	607	668	616	759	814	886	905					
<b>N</b>	21~22	Aluminum-wrought alloy	0.1D	1.5D	Vc	140	130	140	145	140	145	145	145	140	
					fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095
	RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714				
	FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440	1411				
23~25	Aluminum-cast, alloyed	0.1D	1.5D	Vc	140	130	140	145	140	145	145	145	140		
				fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095	
RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714					
FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440	1411					
26-28	Copper and Copper Alloys (Bronze / Brass)	0.1D	1.5D	Vc	80	95	105	105	110	105	105	105	105		
				fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096	
RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785					
FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070					
29.1	Non Metallic Materials	0.1D	1.5D	Vc	80	95	105	105	110	105	105	105	105		
				fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096	
RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785					
FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070					
<b>H</b>	40	Chilled Cast Iron	0.1D	1.0D	Vc	30	35	40	45	50	55	55	55		
fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037					
RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459					
FEED	76	119	153	172	302	306	362	333	266	216					

※ The FEED, in long & extra long types, should be reduced by around 50%



## G9424, G9G44, G9A68, G9444, G9527, G9445, G9G45, G9452 SERIES

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)												
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0
<b>P</b>	1-4	Non-alloy steel	1.0D	0.5D (Up to Ø3:0.2D)	Vc	45	45	50	55	65	70	70	70	70	70	75	75	70
					fz	0.004	0.008	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065	0.063	0.062	0.063
	RPM	14324	9549	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114				
	FEED	115	153	159	175	259	276	290	318	285	241	215	185	140				
	5	0.1D	0.5D (Up to Ø3:0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45	
				fz	0.004	0.008	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	0.048	0.05	0.05	
	RPM	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716				
	FEED	64	85	95	119	159	158	196	179	127	115	98	99	72				
	6-7	Low alloy steel	1.0D	0.5D (Up to Ø3:0.2D)	Vc	45	45	50	55	65	70	70	70	70	75	75	70	
					fz	0.004	0.008	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065	0.063	0.062	0.063
	RPM	14324	9549	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114				
	FEED	115	153	159	175	259	276	290	318	285	241	215	185	140				
8-9	0.1D	0.5D (Up to Ø3:0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45		
			fz	0.004	0.008	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	0.048	0.05	0.05		
RPM	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716					
FEED	64	85	95	119	159	158	196	179	127	115	98	99	72					
10	High alloyed steel, and tool steel	1.0D	0.5D (Up to Ø3:0.2D)	Vc	45	45	50	55	65	70	70	70	70	75	75	70		
				fz	0.004	0.008	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065	0.063	0.062	0.063	
RPM	14324	9549	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114					
FEED	115	153	159	175	259	276	290	318	285	241	215	185	140					
11.1 - 11.2	0.1D	0.5D (Up to Ø3:0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45		
			fz	0.004	0.008	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	0.048	0.05	0.05		
RPM	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716					
FEED	64	85	95	119	159	158	196	179	127	115	98	99	72					
<b>M</b>	14.1	Stainless steel	1.0D	0.5D (Up to Ø3:0.2D)	Vc	20	25	25	30	35	35	35	35	35	35	35		
fz	0.003	0.007	0.009	0.016	0.025	0.031	0.04	0.053	0.059	0.058	0.059	0.068	0.064					
RPM	6366	5305	3979	3183	2785	2228	1857	1393	1114	928	796	696	557					
FEED	38	74	72	102	139	138	149	148	131	108	94	95	71					
<b>K</b>	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	1.0D	Vc	60	55	60	55	60	55	55	60	55	55	55		
					fz	0.005	0.008	0.012	0.018	0.024	0.03	0.043	0.063	0.077	0.102	0.119	0.145	0.189
					RPM	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459	1251	1094	875
					FEED	191	187	229	210	229	210	251	276	294	298	298	317	331
<b>N</b>	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	140	145	140		
					fz	0.004	0.007	0.01	0.015	0.021	0.025	0.032	0.043	0.053	0.065	0.073	0.085	0.11
	RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228				
	FEED	357	386	446	462	468	462	492	496	489	483	481	490	490				
23~25	Aluminum-cast, alloyed	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	140	145	140			
				fz	0.004	0.007	0.01	0.015	0.021	0.025	0.032	0.043	0.053	0.065	0.073	0.085	0.11	
RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228					
FEED	357	386	446	462	468	462	492	496	489	483	481	490	490</					



# RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER



**G9B80** SERIES **2 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.  
Ap = mm

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)						
				0.4	0.5	0.6	0.7	0.8	0.9	1.0
P	1-4	Non-alloy steel	Vc	33~43	42~53	50~64	58~75	58~75	61~76	60~75
			fz	0.003~0.005	0.003~0.005	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014
			RPM	26500~34000	26500~34000	26500~34000	26500~34000	23000~30000	21500~27000	19000~24000
			FEED	170~370	170~370	210~485	210~485	240~535	240~610	240~690
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090
			Vc	24~30	30~38	36~45	42~53	41~53	42~54	42~53
	5	Non-alloy steel	fz	0.002~0.006	0.002~0.006	0.003~0.008	0.003~0.008	0.003~0.010	0.005~0.012	0.006~0.015
			RPM	19000~24000	19000~24000	19000~24000	19000~24000	16500~21000	15000~19000	13500~17000
			FEED	72~290	72~290	95~365	95~365	100~410	135~460	160~510
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090
			Vc	33~43	42~53	50~64	58~75	58~75	61~76	60~75
			fz	0.003~0.005	0.003~0.005	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014
	6-7	Low alloy steel	RPM	26500~34000	26500~34000	26500~34000	26500~34000	23000~30000	21500~27000	19000~24000
			FEED	170~370	170~370	210~485	210~485	240~535	240~610	240~690
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090
			Vc	24~30	30~38	36~45	42~53	41~53	42~54	42~53
			fz	0.002~0.006	0.002~0.006	0.003~0.008	0.003~0.008	0.003~0.010	0.005~0.012	0.006~0.015
			RPM	19000~24000	19000~24000	19000~24000	19000~24000	16500~21000	15000~19000	13500~17000
	8-9	Low alloy steel	FEED	72~290	72~290	95~365	95~365	100~410	135~460	160~510
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090
			Vc	33~43	42~53	50~64	58~75	58~75	61~76	60~75
			fz	0.003~0.005	0.003~0.005	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014
			RPM	26500~34000	26500~34000	26500~34000	26500~34000	23000~30000	21500~27000	19000~24000
			FEED	170~370	170~370	210~485	210~485	240~535	240~610	240~690
10	High alloyed steel, and tool steel	Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	
		Vc	24~30	30~38	36~45	42~53	41~53	42~54	42~53	
		fz	0.002~0.006	0.002~0.006	0.003~0.008	0.003~0.008	0.003~0.010	0.005~0.012	0.006~0.015	
		RPM	19000~24000	19000~24000	19000~24000	19000~24000	16500~21000	15000~19000	13500~17000	
		FEED	72~290	72~290	95~365	95~365	100~410	135~460	160~510	
		Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090	
11.1 - 11.2	High alloyed steel, and tool steel	Vc	24~30	30~38	36~45	42~53	41~53	42~54	42~53	
		fz	0.002~0.006	0.002~0.006	0.003~0.008	0.003~0.008	0.003~0.010	0.005~0.012	0.006~0.015	
	11.1 - 11.2	High alloyed steel, and tool steel	RPM	19000~24000	19000~24000	19000~24000	19000~24000	16500~21000	15000~19000	13500~17000
			FEED	72~290	72~290	95~365	95~365	100~410	135~460	160~510
	11.1 - 11.2	High alloyed steel, and tool steel	Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE

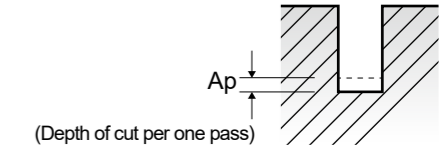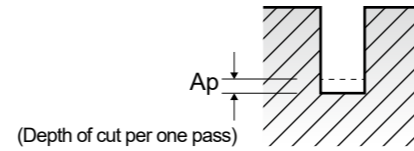

# RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

**G9B80** SERIES **2 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.  
Ap = mm

VDI 3323	Parameter	Mill Diameter (Ø)										
		1.2	1.4	1.5	1.6	1.8	2.0	2.5	3.0	4.0		
1-4	Vc	58~72	60~75	59~73	60~75	62~79	63~79	63~79	64~80	64~82		
	fz	0.008~0.020	0.009~0.023	0.010~0.025	0.010~0.026	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.024~0.059		
	RPM	15500~19000	13600~17000	12500~15500	12000~15000	11000~14000	10000~12500	8000~10000	6800~8500	5100~6500		
	FEED	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765		
5	Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360		
	Vc	41~53	43~53	42~54	44~55	44~55	44~56	45~57	44~57	44~57		
	fz	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.028	0.014~0.035	0.017~0.043	0.023~0.057		
	RPM	11000~14000	9800~12000	8950~11500	8700~10900	7800~9800	7000~8950	5700~7200	4700~6000	3500~4500		
6-7	FEED	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510		
	Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360		
	Vc	58~72	60~75	59~73	60~75	62~79	63~79	63~79	64~80	64~82		
	fz	0.008~0.020	0.009~0.023	0.010~0.025	0.010~0.026	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.024~0.059		
8-9	RPM	15500~19000	13600~17000	12500~15500	12000~15000	11000~14000	10000~12500	8000~10000	6800~8500	5100~6500		
	FEED	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765		
	Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360		
	Vc	41~53	43~53	42~54	44~55	44~55	44~56	45~57	44~57	44~57		
10	fz	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.028	0.014~0.035	0.017~0.043	0.023~0.057		
	RPM	11000~14000	9800~12000	8950~11500	8700~10900	7800~9800	7000~8950	5700~7200	4700~6000	3500~4500		
	FEED	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510		
	Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360		
11.1 - 11.2	Vc	58~72	60~75	59~73	60~75	62~79	63~79	63~79	64~80	64~82		
	fz	0.008~0.020	0.009~0.023	0.010~0.025	0.010~0.026	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.024~0.059		
	RPM	15500~19000	13600~17000	12500~15500	12000~15000	11000~14000	10000~12500	8000~10000	6800~8500	5100~6500		
	FEED	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765		
	11.1 - 11.2	High alloyed steel, and tool steel	Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360
			Vc	41~53	43~53	42~54	44~55	44~55	44~56	45~57	44~57	44~57
	11.1 - 11.2	High alloyed steel, and tool steel	fz	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.028	0.014~0.035	0.017~0.043	0.023~0.057
			RPM	11000~14000	9800~12000	8950~11500	8700~10900	7800~9800	7000~8950	5700~7200	4700~6000	3500~4500
	11.1 - 11.2	High alloyed steel, and tool steel	FEED	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510	
			Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360





**RECOMMENDED CUTTING CONDITIONS**  
**EMPFOHLENE SCHNEIDPARAMETER**


**G9553, G9G46, G9410, G9425, G9G47, G9439**  
**G9528, G9433, G9G48, G9447, G9G49** SERIES

**3 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)																																																			
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0																																							
						Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED																																
<b>P</b>	1-4	Non-alloy steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	75	75	70	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	0.029	0.029	14324	12732	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114	86	115	119	123	186	201	201	226	201	217	148	130	97
5	Vc				25	25	30	35	40	40	45	45	40	45	45	40	45	50	45	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716	48	64	72	78	115	107	143	129	88	79	68	69
6-7	Low alloy steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	75	75	70	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	14324	12732	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114	86	115	119	123	186	201	201	226	201	173	148	130	97			
				8-9	Vc	25	25	30	35	40	40	45	45	40	45	45	40	45	50	45	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.023	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716	48	64	72	78	115	107	143	129	88	79	68	69	52
10	High alloyed steel, and tool steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	75	75	70	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	14324	12732	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114	86	115	119	123	186	201	201	226	201	173	148	130	97			
				11.1 - 11.2	Vc	25	25	30	35	40	40	45	45	40	45	45	40	45	50	45	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.023	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716	48	64	72	78	115	107	143	129	88	79	68	69	52
<b>M</b>	14.1	Stainless steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	20	25	25	30	35	35	35	35	35	35	35	35	0.002	0.003	0.004	0.007	0.011	0.015	0.019	0.025	0.028	0.026	0.027	0.031	0.03	6366	5305	3979	3183	2785	2228	1857	1393	1114	928	796	696	557	38	48	48	67	92	100	106	104	64	65	50			
<b>K</b>	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	1.0D	Vc	60	55	60	55	60	55	55	60	55	55	55	55	0.003	0.005	0.007	0.011	0.013	0.018	0.026	0.036	0.046	0.063	0.073	0.086	0.115	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459	1251	1094	875	172	175	201	193	186	228	236	264	276	274	282	302		
<b>N</b>	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	140	145	145	140	0.002	0.004	0.006	0.009	0.013	0.015	0.019	0.026	0.032	0.038	0.043	0.05	0.065	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228	267	331	401	415	434	415	438	450	443	423	425	433	434	
	23~25	Aluminum-cast, alloyed	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	140	145	145	140	0.002	0.004	0.006	0.009	0.013	0.015	0.019	0.026	0.032	0.038	0.043	0.05	0.065	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228	267	331	401	415	434	415	438	450	443	423	425	433	434	
	26-28	Copper and Copper Alloys (Bronze / Brass)	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	110	105	0.002	0.004	0.006	0.009	0.012	0.015	0.02	0.025	0.032	0.039	0.046	0.05	0.065	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671	153	242	301	301	315	301	334	328	321	326	329	328	326	
	29.1	Non Metallic Materials	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	110	105	0.002	0.004	0.006	0.009	0.012	0.015	0.02	0.025	0.032	0.039	0.046	0.05	0.065	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671	153	242	301	301	315	301	334	328	321	326	329	328	326	
<b>H</b>	40	Chilled Cast Iron	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	45	45	40	45	50	45	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716	48	64	72	78	115	107	143	129	88	79	68	69	52		

※ The FEED, in long & extra long types, should be reduced by around 50%



**K-2 END MILLS**

**RECOMMENDED CUTTING CONDITIONS**  
**EMPFOHLENE SCHNEIDPARAMETER**

**G9553, G9G46, G9410, G9425, G9G47, G9439**  
**G9528, G9433, G9G48, G9447, G9G49** SERIES

**3 FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev/min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)																																																		
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0																																						
						Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED	Vc	fz	RPM	FEED															
<b>P</b>	1-4	Non-alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	90	90	90	90	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.048	0.047	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432	105	175	172	201	363	390	430	451	381	337	289	272	202
5	Vc				30	35	40	45	50	50	55	55	55	55	55	55	55	55	55	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194
6-7	Low alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	90	90	90	90	90	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.048	0.047	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432	105	175	172	201	363	390	430	451	381	337	289	272	202	
				8-9	Vc	30	35	40	45	50	50	55	55	55	55	55	55	55	55	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875	57	89	115	129	227	229	271	249	200	162	139	136	97
10	High alloyed steel, and tool steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	90	90	90	90	90	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.048	0.047	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432	105	175	172	201	363	390	430	451	381	337	289	272	202	
				11.1 - 11.2	Vc	30	35	40	45	50	50	55	55	55	55	55	55	55	55	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875	57	89	115	129	227	229	271	249	200	162	139	136	97
<b>M</b>	14.1	Stainless steel	0.1D	1.0D	Vc	25	35	35	35	40	40	45	45	45	45	45	45	0.002	0.004	0.006	0.009	0.018	0.024	0.03	0.042	0.045	0.045	0.044	0.048	7958	7427	5570	3714	3183																						




## RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

### G9432, G9G50, G9A69, G9448, G9540, G9449, G9G51, G9453 SERIES 4 FLUTE - SIDE CUTTING

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)														
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0		
P	1-4	Non-alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90		
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	0.047	0.047	0.047	0.047	0.047
	RPM		17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432					
	FEED		140	233	229	267	484	519	554	616	509	449	385	355	269					
	5	Non-alloy steel	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	60	55			
					fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038		
	RPM		9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875					
	FEED		76	119	153	172	302	306	362	333	266	216	190	177	133					
	6-7	Low alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90		
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	0.047	0.047	0.047		
	RPM		17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432					
	FEED		140	233	229	267	484	519	554	616	509	449	385	355	269					
8-9	Low alloy steel	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	60	55				
				fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038			
RPM		9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875						
FEED		76	119	153	172	302	306	362	333	266	216	190	177	133						
10	High alloyed steel, and tool steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90			
				fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	0.047	0.047	0.047			
RPM		17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432						
FEED		140	233	229	267	484	519	554	616	509	449	385	355	269						
11.1 11.2	High alloyed steel, and tool steel	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	60	55				
				fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038			
RPM		9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875						
FEED		76	119	153	172	302	306	362	333	266	216	190	177	133						
M	14.1	Stainless steel	0.1D	1.0D	Vc	25	35	35	40	40	45	45	45	45	50	45				
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.1D	1.5D	fz	0.002	0.004	0.006	0.009	0.018	0.024	0.029	0.042	0.044	0.045	0.045	0.045	0.046		
					RPM	7958	7427	5570	3714	3183	2546	2387	1790	1432	1194	1023	995	716		
					FEED	64	119	134	134	229	244	277	301	252	215	184	179	132		
H	38.1 38.2 39.1	Hardened steel	0.03D	1.5D	Vc	60	55	60	55	60	55	55	60	55	55	55	55			
					fz	0.008	0.013	0.017	0.026	0.035	0.044	0.065	0.093	0.116	0.155	0.182	0.22	0.288		
					RPM	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459	1251	1094	875		
N	21~22	Aluminum-wrought alloy	0.1D	1.5D	FEED	611	607	649	607	668	616	759	814	886	905	910	963	1008		
					Vc	140	130	140	145	140	145	145	145	145	140	145	145	140		
					fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095	0.108	0.125	0.163		
N	23~25	Aluminum-cast, alloyed	0.1D	1.5D	RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228		
					FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440	1411	1424	1442	1453		
					Vc	140	130	140	145	140	145	145	145	140	145	145	140			
N	26-28	Copper and Copper Alloys (Bronze / Brass)	0.1D	1.5D	fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095	0.108	0.125	0.163		
					RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228		
					FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440	1411	1424	1442	1453		
H	40	Chilled Cast Iron	0.1D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	110	105			
					fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096	0.115	0.125	0.162		
					RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671		
N	29.1	Non Metallic Materials	0.1D	1.5D	FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070	1098	1094	1083		
					Vc	80	95	105	105	110	105	105	110	105	105	110	105			
					fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096	0.115	0.125	0.162		
H	40	Chilled Cast Iron	0.1D	1.0D	RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671		
					FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070	1098	1094	1083		
					Vc	30	35	40	45	50	50	55	55	55	55	60	55			
H	40	Chilled Cast Iron	0.1D	1.0D	fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038		
					RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875		
					FEED	76	119	153	172	302	306	362	333	266	216	190	177	133		

※ The FEED, in long & extra long types, should be reduced by around 50%



## K-2 END MILLS

## RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

### G9F45, G9F46 SERIES 4&6 FLUTE - SIDE CUTTING

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)														
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0				
P	1-4	Non-alloy steel	0.05D	1.5D	Vc	82	83	98	98	97	97	99	98	98	97	97				
					fz	0.024	0.033	0.025	0.03	0.045	0.045	0.053	0.058	0.062	0.065	0.069				
	RPM		8700	6605	6239	5199	3860	3088	2626	2228	1950	1715	1544							
	FEED		835	872	936	936	1042	834	835	775	725	669	639							
	5	Non-alloy steel	0.03D	1.5D	Vc	54	55	65	65	65	64	66	66	65	65	64				
					fz	0.024	0.033	0.027	0.03	0.038	0.045	0.053	0.057	0.062	0.066	0.07				
	RPM		5730	4377	4138	3448	2586	2037	1751	1501	1293	1149	1019							
	FEED		550	578	670	621	590	550	557	513	481	455	428							
	6-7	Low alloy steel	0.05D	1.5D	Vc	82	83	98	98	97	97	99	98	98	97	97				
					fz	0.024	0.033	0.025	0.03	0.045	0.045	0.053	0.058	0.062	0.065	0.069				
	RPM		8700	6605	6239	5199	3860	3088	2626	2228	1950	1715	1544							
	FEED		835	872	936	936	1042	834	835	775	725	669	639							
8-9	Low alloy steel	0.03D	1.5D	Vc	54	55	65	65	65	64	66	66	65	65	64					
				fz	0.024	0.033	0.027	0.03	0.038	0.045	0.053	0.057	0.062	0.066	0.07					
RPM		5730	4377	4138	3448	2586	2037	1751	1501	1293	1149	1019								
FEED		550	578	670	621	590	550	557	513	481	455	428								
10	High alloyed steel, and tool steel	0.05D	1.5D	Vc	82	83	98	98	97	97	99	98	98	97	97					
				fz	0.024	0.033	0.025	0.03	0.045	0.045	0.053	0.058	0.062	0.065	0.069					
RPM		8700	66																	




### RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

#### G9A42 SERIES MULTI FLUTE ROUGHING - SIDE CUTTING

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)										
						6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	25.0		
P	1-4	Non-alloy steel	0.3D	1.5D	Vc	250	250	245	255	255	255	250	260	285		
					fz	0.05	0.067	0.063	0.075	0.088	0.1	0.112	0.112	0.1		
	RPM		13263	9947	7799	6764	5798	5073	4421	4138	3629					
	FEED		1989	1999	1965	2029	2041	2029	1981	1854	1814					
	5	Non-alloy steel	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210		
					fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039		
	RPM		10610	7759	6525	5040	4434	4078	3714	3024	2674					
	FEED		700	535	731	665	709	653	609	472	521					
	6-7	Low alloy steel	0.3D	1.5D	Vc	250	250	245	255	255	255	250	260	285		
					fz	0.05	0.067	0.063	0.075	0.088	0.1	0.112	0.112	0.1		
	RPM		13263	9947	7799	6764	5798	5073	4421	4138	3629					
	FEED		1989	1999	1965	2029	2041	2029	1981	1854	1814					
8-9	Low alloy steel	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210			
				fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039			
RPM		10610	7759	6525	5040	4434	4078	3714	3024	2674						
FEED		700	535	731	665	709	653	609	472	521						
10	High alloyed steel, and tool steel	0.3D	1.5D	Vc	250	250	245	255	255	255	250	260	285			
				fz	0.05	0.067	0.063	0.075	0.088	0.1	0.112	0.112	0.1			
RPM		13263	9947	7799	6764	5798	5073	4421	4138	3629						
FEED		1989	1999	1965	2029	2041	2029	1981	1854	1814						
11.1 - 11.2	High alloyed steel, and tool steel	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210			
				fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039			
RPM		10610	7759	6525	5040	4434	4078	3714	3024	2674						
FEED		700	535	731	665	709	653	609	472	521						
M	14.1	Stainless steel	0.05D	1.0D	Vc	135	135	135	135	135	140	130	145			
					fz	0.022	0.022	0.028	0.034	0.039	0.038	0.039	0.038	0.038		
S	31-35	Heat Resistant Super Alloys	0.05D	1.0D	Vc	40	40	35	40	35	35	35	40			
					fz	0.026	0.024	0.036	0.04	0.037	0.032	0.038	0.041	0.06		
H	40	Chilled Cast Iron	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210		
					fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039		
					RPM	10610	7759	6525	5040	4434	4078	3714	3024	2674		
					FEED	700	535	731	665	709	653	609	472	521		

※ The FEED, in long & extra long types, should be reduced by around 50%



### K-2 END MILLS


### RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

#### G9400 SERIES 2 FLUTE DRILL MILLS - CHAMFERING

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)										
				3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0		
P	1-2	Non-alloy steel	Vc	60	65	65	60	60	65	70	70	85		
			fz	0.025	0.031	0.04	0.052	0.071	0.083	0.1	0.125	0.137		
	RPM		6366	5173	4138	3183	2387	2069	1857	1393	1353			
	FEED		318	321	331	331	339	343	371	348	371			
	3-4		Non-alloy steel	Vc	45	55	55	55	55	55	60	65	65	
				fz	0.023	0.027	0.036	0.043	0.058	0.073	0.091	0.105	0.14	
	RPM	4775		4377	3501	2918	2188	1751	1592	1293	1035			
	FEED	220		236	252	251	254	256	290	272	290			
	5	Low alloy steel		Vc	40	45	45	40	40	50	50	50	55	
				fz	0.023	0.028	0.035	0.044	0.06	0.066	0.083	0.115	0.134	
	RPM		4244	3581	2865	2122	1592	1592	1326	995	875			
	FEED		195	201	201	187	191	210	220	229	235			
	6		High alloyed steel, and tool steel	Vc	60	65	65	60	60	65	70	70	85	
				fz	0.025	0.031	0.04	0.052	0.071	0.083	0.1	0.125	0.137	
	RPM	6366		5173	4138	3183	2387	2069	1857	1393	1353			
	FEED	318		321	331	331	339	343	371	348	371			
	7	Low alloy steel		Vc	45	55	55	55	55	55	60	65	65	
				fz	0.023	0.027	0.036	0.043	0.058	0.073	0.091	0.105	0.14	
RPM	4775		4377	3501	2918	2188	1751	1592	1293	1035				
FEED	220		236	252	251	254	256	290	272	290				
8-9	High alloyed steel, and tool steel		Vc	40	45	45	40	40	50	50	50	55		
			fz	0.023	0.028	0.035	0.044	0.06	0.066	0.083	0.115	0.134		
RPM		4244	3581	2865	2122	1592	1592	1326	995	875				
FEED		195	201	201	187	191	210	220	229	235				
10		High alloyed steel, and tool steel	Vc	60	65	65	60	60	65	70	70	85		
			fz	0.025	0.031	0.04	0.052	0.071	0.083	0.1	0.125	0.137		
RPM	6366		5173	4138	3183	2387	2069	1857	1393	1353				
FEED	318		321	331	331	339	343	371	348	371				
11.1	High alloyed steel, and tool steel		Vc	40	45	45	40	40	50	50	50	55		
			fz	0.023	0.028	0.035	0.044	0.06	0.066	0.083	0.115	0.134		
RPM		4244	3581	2865	2122	1592	1592	1326	995	875				
FEED		195	201	201	187	191	210	220	229	235				
M		14.1	Stainless steel	Vc	30	35	40	35	35	40	40	40	45	
				fz	0.021	0.025	0.029	0.037	0.055	0.064	0.078	0.11	0.122	
N	21~22	Aluminum-wrought alloy	RPM	3183	2785	2546	1857	1393	1273	1061	796	716		
			FEED	134	139	148	137	153	163	166	175	175		
N	23~25	Aluminum-cast, alloyed	Vc	145	160	150	150	155	175	185	195	195		
			fz	0.025	0.032	0.045	0.057	0.075	0.085	0.1	0.134	0.175		
			RPM	15385	12732	9549	7958	6167	5570	4907	3879	3104		
			FEED	769	815	859	907	925	947	981	1040	1086		
			Vc	145	160	150	150	155	175	185	195	195		
			fz	0.025	0.032	0.045	0.057	0.075	0.085	0.1	0.134	0.175		
			RPM	15385	12732	9549	7958	6167	5570	4907	3879	3104		
			FEED	769	815	859	907	925	947	981	1040	1086		

※ The FEED, in long & extra long types, should be reduced by around 50%





# RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER


## G9400 SERIES

### 2 FLUTE DRILL MILLS - CHAMFERING & SIDE CUTTING

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)														
				3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0						
P	1-2	Non-alloy steel	Vc	80	85	85	80	80	90	95	90	95						
			fz	0.008	0.01	0.013	0.018	0.025	0.03	0.037	0.054	0.063						
			RPM	8488	6764	5411	4244	3183	2865	2520	1790	1512						
	FEED		136	135	141	153	159	172	186	193	191							
	3-4		Low alloy steel	Vc	50	55	55	55	55	55	60	65	60					
				fz	0.008	0.01	0.013	0.018	0.024	0.03	0.041	0.05	0.064					
				RPM	5305	4377	3501	2918	2188	1751	1592	1293	955					
	FEED			85	88	91	105	105	105	131	129	122						
	5			High alloyed steel, and tool steel	Vc	45	50	50	50	45	55	55	55	55				
					fz	0.008	0.009	0.012	0.017	0.025	0.027	0.036	0.046	0.06				
					RPM	4775	3979	3183	2653	1790	1751	1459	1094	875				
	FEED				76	72	76	90	90	95	105	101	105					
6	Stainless steel	Vc			80	85	85	80	80	90	95	90	95					
		fz			0.008	0.01	0.013	0.018	0.025	0.03	0.037	0.054	0.063					
		RPM			8488	6764	5411	4244	3183	2865	2520	1790	1512					
FEED		136			135	141	153	159	172	186	193	191						
7		Aluminum-wrought alloy	Vc		50	55	55	55	55	60	65	60						
			fz		0.008	0.01	0.013	0.018	0.024	0.03	0.041	0.05	0.064					
			RPM		5305	4377	3501	2918	2188	1751	1592	1293	955					
FEED			85		88	91	105	105	105	131	129	122						
8-9			Aluminum-cast, alloyed	Vc	45	50	50	50	45	55	55	55						
				fz	0.008	0.009	0.012	0.017	0.025	0.027	0.036	0.046	0.06					
				RPM	4775	3979	3183	2653	1790	1751	1459	1094	875					
FEED				76	72	76	90	90	95	105	101	105						
10	Titanium Alloys			Vc	80	85	85	80	80	90	95	90	95					
				fz	0.008	0.01	0.013	0.018	0.025	0.03	0.037	0.054	0.063					
				RPM	8488	6764	5411	4244	3183	2865	2520	1790	1512					
FEED				136	135	141	153	159	172	186	193	191						
11.1		Titanium Alloys		Vc	45	50	50	50	45	55	55	55						
				fz	0.008	0.009	0.012	0.017	0.025	0.027	0.036	0.046	0.06					
				RPM	4775	3979	3183	2653	1790	1751	1459	1094	875					
FEED				76	72	76	90	90	95	105	101	105						
M 14.1			Stainless steel	Vc	30	35	40	35	40	45	45	45	40					
				fz	0.008	0.01	0.013	0.018	0.024	0.027	0.036	0.046	0.069					
				RPM	3183	2785	2546	1857	1592	1432	1194	895	637					
FEED				51	56	66	67	76	77	86	82	88						
N 21~22	Aluminum-wrought alloy			Vc	185	210	210	205	205	225	230	230	230					
				fz	0.008	0.01	0.013	0.019	0.03	0.037	0.045	0.05	0.064					
				RPM	19629	16711	13369	10876	8157	7162	6101	4576	3661					
FEED				314	334	348	413	489	530	549	458	469						
N 23~25		Aluminum-cast, alloyed		Vc	185	210	210	205	205	225	230	230	230					
				fz	0.008	0.01	0.013	0.019	0.03	0.037	0.045	0.05	0.064					
				RPM	19629	16711	13369	10876	8157	7162	6101	4576	3661					
FEED				314	334	348	413	489	530	549	458	469						
S 36-37			Titanium Alloys	Vc	30	35	40	35	40	45	45	45	40					
				fz	0.008	0.01	0.013	0.018	0.024	0.027	0.036	0.046	0.069					
				RPM	3183	2785	2546	1857	1592	1432	1194	895	637					
FEED				51	56	66	67	76	77	86	82	88						

※ The FEED, in long & extra long types, should be reduced by around 50%



# K-2 END MILLS

# RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

## G9400 SERIES

### 2 FLUTE DRILL MILLS - V-GROOVING

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)														
				3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0						
P	1-2	Non-alloy steel	Vc	80	85	85	80	80	90	95	100	95						
			fz	0.005	0.006	0.008	0.01	0.014	0.016	0.018	0.023	0.029						
			RPM	8488	6764	5411	4244	3183	2865	2520	1989	1512						
	FEED		85	81	87	85	89	92	91	92	88							
	3-4		Low alloy steel	Vc	55	60	55	55	55	55	55	65	60					
				fz	0.004	0.004	0.006	0.007	0.012	0.014	0.02	0.022	0.028					
				RPM	5836	4775	3501	2918	2188	1751	1459	1293	955					
	FEED			47	38	42	41	53	49	58	57	53						
	5			High alloyed steel, and tool steel	Vc	45	50	50	50	45	55	55	55	55				
					fz	0.004	0.004	0.006	0.008	0.014	0.015	0.018	0.023	0.03				
					RPM	4775	3979	3183	2653	1790	1751	1459	1094	875				
	FEED				38	32	38	42	50	53	53	50	53					
6	Stainless steel	Vc			80	85	85	80	80	90	95	100	95					
		fz			0.005	0.006	0.008	0.01	0.014	0.016	0.018	0.023	0.029					
		RPM			8488	6764	5411	4244	3183	2865	2520	1989	1512					
FEED		85			81	87	85	89	92	91	92	88						
7		Aluminum-wrought alloy	Vc		55	60	55	55	55	55	55	65	60					
			fz		0.004	0.004	0.006	0.007	0.012	0.014	0.02	0.022	0.028					
			RPM		5836	4775	3501	2918	2188	1751	1459	1293	955					
FEED			47		38	42	41	53	49	58	57	53						
8-9			Aluminum-cast, alloyed	Vc	45	50	50	50	45	55	55	55	55					
				fz	0.004	0.004	0.006	0.008	0.014	0.015	0.018	0.023	0.03					
				RPM	4775	3979	3183	2653	1790	1751	1459	1094	875					
FEED				38	32	38	42	50	53	53	50	53						
10	Titanium Alloys			Vc	80	85	85	80	80	90	95	100	95					
				fz	0.005	0.006	0.008	0.01	0.014	0.016	0.018	0.023	0.029					
				RPM	8488	6764	5411	4244	3183	2865	2520	1989	1512					
FEED				85	81	87	85	89	92	91	92	88						
11.1		Titanium Alloys		Vc	45	50	50	50	45	55	55	55	55					
				fz	0.004	0.004	0.006	0.008	0.014	0.015	0.018	0.023	0.03					
				RPM	4775	3979	3183	2653	1790	1751	1459	1094	875					
FEED				38	32	38	42	50	53	53	50	53						
M 14.1			Stainless steel	Vc	30	35	40	35	40	45	45	45	40					
				fz	0.004	0.005	0.006	0.008	0.01	0.011	0.013	0.019	0.028					
				RPM	3183	2785	2546	1857	1592	1432	1194	895	637					
FEED				25	28	31	30	32	32	31	34	36						
N 21~22	Aluminum-wrought alloy			Vc	185	210	210	205	205	225	230	230	230					
				fz	0.008	0.01	0.013	0.019	0.03	0.037	0.045	0.05	0.064					
				RPM	19629	16711	13369	10876	8157	7162	6101	4576	3661					
FEED				314	334	348	413	489	530	549	458	469						
N 23~25		Aluminum-cast, alloyed		Vc	185	2												